



# 9.6 TREND MICRO™ Mobile Security™

Administrator's Guide

Comprehensive security for enterprise handhelds



Endpoint Security

Trend Micro Incorporated reserves the right to make changes to this document and to the products described herein without notice. Before installing and using the product, please review the readme files, release notes, and the latest version of the applicable user documentation, which are available from the Trend Micro website at:

<http://docs.trendmicro.com>

Trend Micro, the Trend Micro t-ball logo, OfficeScan, and TrendLabs are trademarks or registered trademarks of Trend Micro Incorporated. All other product or company names may be trademarks or registered trademarks of their owners.

Copyright © 2016. Trend Micro Incorporated. All rights reserved.

Document Part No. TSEM97293\_160105

Release Date: March 2016

The user documentation for Trend Micro™ Mobile Security for Enterprise introduces the main features of the product and provides installation instructions for your production environment. Read through the documentation before installing or using the product.

Detailed information about how to use specific features within the product is available in the Online Help and the Knowledge Base at the Trend Micro website.

Trend Micro always seeks to improve its documentation. If you have questions, comments, or suggestions about this or any Trend Micro document, please contact us at [docs@trendmicro.com](mailto:docs@trendmicro.com).

Please evaluate this documentation on the following site:

<http://www.trendmicro.com/download/documentation/rating.asp>



# Table of Contents

## Preface

|                                     |      |
|-------------------------------------|------|
| Preface .....                       | vii  |
| Audience .....                      | viii |
| Mobile Security Documentation ..... | viii |
| Document Conventions .....          | ix   |

## Chapter 1: Introduction

|  |      |
|--|------|
| Understanding Mobile Threats .....                       | 1-2  |
| About Trend Micro Mobile Security .....                  | 1-2  |
| Architecture of Mobile Security System .....             | 1-2  |
| Components of Mobile Security System .....               | 1-3  |
| Comparison Between Local and Communication Servers ..... | 1-6  |
| What's New in this Release (9.6) .....                   | 1-6  |
| What's New in Release 9.5 .....                          | 1-7  |
| What's New in Release 9.3 .....                          | 1-8  |
| Main Mobile Device Agent Features .....                  | 1-9  |
| Supported Mobile Device OS Features .....                | 1-12 |

## Chapter 2: Getting Started with Mobile Security

|   |     |
|---|-----|
| Administration Web Console .....                          | 2-2 |
| Accessing the Administration Web Console .....            | 2-2 |
| Turning Off Compatibility Mode in Internet Explorer ..... | 2-4 |
| Product License .....                                     | 2-4 |
| Dashboard Information .....                               | 2-5 |
| Customizing the Dashboard .....                           | 2-7 |

|  |      |
|--|------|
| Administration Settings .....                          | 2-10 |
| Configuring Active Directory (AD) Settings .....       | 2-10 |
| Configuring User Authentication .....                  | 2-10 |
| Configuring Database Settings .....                    | 2-10 |
| Configuring Communication Server Settings .....        | 2-10 |
| Managing Administrator Accounts .....                  | 2-10 |
| Command Queue Management .....                         | 2-18 |
| Configuring Schedule for Deleting Old Commands .....   | 2-19 |
| Deleting Old Commands Manually .....                   | 2-19 |
| Exchange Server Integration .....                      | 2-20 |
| Configuring Exchange Server Integration Settings ..... | 2-20 |
| Configuring Exchange Connector .....                   | 2-20 |
| Managing Certificates .....                            | 2-21 |
| Uploading a Certificate .....                          | 2-21 |
| Deleting a Certificate .....                           | 2-21 |

## Chapter 3: Managing Mobile Devices

|  |      |
|--|------|
| Managed Devices Tab .....                            | 3-2  |
| Groups in Mobile Security .....                      | 3-2  |
| Managing Groups .....                                | 3-3  |
| Managing Mobile Devices .....                        | 3-4  |
| Mobile Device Status .....                           | 3-8  |
| Mobile Device Agent Tasks .....                      | 3-10 |
| Updating Mobile Device Agents .....                  | 3-10 |
| Lost Device Protection .....                         | 3-11 |
| Resetting Password Remotely .....                    | 3-14 |
| Managing Samsung KNOX Workspace Remotely .....       | 3-15 |
| Modifying iOS Settings Remotely .....                | 3-16 |
| Exporting Data .....                                 | 3-17 |
| Sending Messages to Mobile Devices .....             | 3-18 |
| Exchange ActiveSync Devices Tab .....                | 3-18 |
| Inviting Exchange ActiveSync Users .....             | 3-19 |
| Allowing or Blocking Access to Exchange Server ..... | 3-19 |
| Wiping a Remote ActiveSync Mobile Device .....       | 3-20 |
| Removing an ActiveSync Mobile Device .....           | 3-21 |

|  |      |
|--|------|
| Device Enrollment Program Tab .....                                | 3-21 |
| Device Enrollment Program User Experience .....                    | 3-22 |
| Setting Up Mobile Security for the Device Enrollment Program ..... | 3-23 |
| Integration with Trend Micro Control Manager .....                 | 3-25 |
| Creating Security Policies in Control Manager .....                | 3-25 |
| Deleting or Modifying Security Policies .....                      | 3-25 |
| Security Policy Statuses on Control Manager .....                  | 3-26 |

## **Chapter 4: Managing Users and Invitations**

|  |     |
|--|-----|
| Users Tab .....                          | 4-2 |
| Viewing the Users List .....             | 4-2 |
| Inviting a User to Register .....        | 4-3 |
| Inviting a User Again .....              | 4-6 |
| Editing User Information .....           | 4-6 |
| Deleting a User .....                    | 4-7 |
| Invitations Tab .....                    | 4-7 |
| Viewing the Invitations List .....       | 4-7 |
| Resending Invitations .....              | 4-8 |
| Canceling Active Invitations .....       | 4-9 |
| Removing Invitations from the List ..... | 4-9 |

## **Chapter 5: Protecting Devices with Policies**

|   |     |
|---|-----|
| About Security Policies .....                   | 5-2 |
| Managing Policies .....                         | 5-3 |
| Creating a Policy .....                         | 5-4 |
| Editing a Policy .....                          | 5-4 |
| Assigning or Removing Policy from a Group ..... | 5-5 |
| Copying a Policy .....                          | 5-5 |
| Deleting Policies .....                         | 5-6 |
| Configuring Application Availability .....      | 5-6 |
| Security Policies in Mobile Security .....      | 5-7 |
| Common Policy .....                             | 5-7 |
| Wi-Fi Policy .....                              | 5-8 |
| Exchange ActiveSync Policy .....                | 5-8 |
| VPN Policy .....                                | 5-9 |

|  |      |
|--|------|
| Global HTTP Proxy Policy .....               | 5-9  |
| Certificate Policy .....                     | 5-9  |
| Single Sign-On Policy .....                  | 5-9  |
| AirPlay/AirPrint Policy .....                | 5-10 |
| Cellular Network Policy .....                | 5-11 |
| Theme Policy .....                           | 5-11 |
| Managed Domains Policy .....                 | 5-11 |
| Security Protection Policy .....             | 5-12 |
| Spam Prevention Policy .....                 | 5-15 |
| Call Filtering Policy .....                  | 5-18 |
| Web Threat Protection Policy .....           | 5-20 |
| Password Policy .....                        | 5-20 |
| Feature Lock Policy .....                    | 5-20 |
| Compliance Policy .....                      | 5-21 |
| Application Monitor and Control Policy ..... | 5-21 |
| Volume Purchasing Program Policy .....       | 5-23 |
| Container Policy .....                       | 5-24 |

## Chapter 6: Managing Apps

|  |      |
|--|------|
| About the Enterprise App Store .....                                 | 6-2  |
| Managing Enterprise Apps .....                                       | 6-2  |
| Managing Application Categories .....                                | 6-5  |
| Managing Apps Purchased through the Volume Purchase Program<br>..... | 6-6  |
| About Installed Apps .....   | 6-10 |
| Viewing the Installed Android Apps List .....                        | 6-12 |
| Viewing the Installed iOS Apps List .....                            | 6-13 |

## Chapter 7: Updating Components

|   |     |
|---|-----|
| About Component Updates .....             | 7-2 |
| Updating Mobile Security Components ..... | 7-2 |
| Manual Update .....                       | 7-2 |
| Scheduled Update .....                    | 7-3 |
| Specifying a Download Source .....        | 7-5 |
| Manually Updating a local AU server ..... | 7-6 |



## Chapter 8: Viewing and Maintaining Logs

|  |     |
|--|-----|
| About Mobile Device Agent Logs .....   | 8-2 |
| Viewing Mobile Device Agent Logs ..... | 8-2 |
| Log Maintenance .....                  | 8-4 |
| Scheduling Log Deleting .....          | 8-4 |
| Deleting Logs Manually .....           | 8-5 |

## Chapter 9: Using Notifications and Reports

|   |     |
|---|-----|
| About Notification Messages and Reports .....         | 9-2 |
| Configuring Notification Settings .....               | 9-2 |
| Configuring Email Notifications .....                 | 9-2 |
| Administrator Notifications .....                     | 9-3 |
| Enabling Administrator Notifications .....            | 9-3 |
| Configuring Administrator Notification Settings ..... | 9-4 |
| Reports .....   | 9-4 |
| Generating Reports .....                              | 9-5 |
| Viewing Reports .....                                 | 9-6 |
| Sending Reports .....                                 | 9-7 |
| Scheduling Reports .....                              | 9-8 |
| Modifying the Email Template .....                    | 9-8 |
| User Notifications .....                              | 9-9 |
| Configuring User Notifications .....                  | 9-9 |

## Chapter 10: Troubleshooting and Contacting Technical Support

|   |      |
|---|------|
| Troubleshooting .....                           | 10-2 |
| Before Contacting Technical Support .....       | 10-5 |
| Contacting Trend Micro .....                    | 10-5 |
| Sending Suspicious Content to Trend Micro ..... | 10-6 |
| File Reputation Services .....                  | 10-6 |
| TrendLabs .....                                 | 10-6 |

|                              |      |
|------------------------------|------|
| About Software Updates ..... | 10-6 |
| Known Issues .....           | 10-7 |
| Other Useful Resources ..... | 10-8 |
| About Trend Micro .....      | 10-8 |

## **Index**

|             |      |
|-------------|------|
| Index ..... | IN-1 |
|-------------|------|

# Preface

## Preface

Welcome to the Trend Micro™ Mobile Security for Enterprise version 9.6 Administrator's Guide. This guide provides detailed information about all Mobile Security configuration options. Topics include how to update your software to keep protection current against the latest security risks, how to configure and use policies to support your security objectives, configuring scanning, synchronizing policies on mobile devices, and using logs and reports.

This preface discusses the following topics:

- *Audience on page viii*
- *Mobile Security Documentation on page viii*
- *Document Conventions on page ix*

## Audience

The Mobile Security documentation is intended for both administrators—who are responsible for administering and managing Mobile Device Agents in enterprise environments—and mobile device users.

Administrators should have an intermediate to advanced knowledge of Windows system administration and mobile device policies, including:

- Installing and configuring Windows servers
- Installing software on Windows servers
- Configuring and managing mobile devices
- Network concepts (such as IP address, netmask, topology, and LAN settings)
- Various network topologies
- Network devices and their administration
- Network configurations (such as the use of VLAN, HTTP, and HTTPS)

## Mobile Security Documentation

The Mobile Security documentation consists of the following:

- *Installation and Deployment Guide*—this guide helps you get “up and running” by introducing Mobile Security, and assisting with network planning and installation.
- *Administrator’s Guide*—this guide provides detailed Mobile Security configuration policies and technologies.
- *Online help*—the purpose of online help is to provide “how to’s” for the main product tasks, usage advice, and field-specific information such as valid parameter ranges and optimal values.
- *Readme*—the Readme contains late-breaking product information that is not found in the online or printed documentation. Topics include a description of new features, installation tips, known issues, and release history.

- *Knowledge Base*— the Knowledge Base is an online database of problem-solving and troubleshooting information. It provides the latest information about known product issues. To access the Knowledge Base, open:

<http://esupport.trendmicro.com/>





### Tip



Trend Micro recommends checking the corresponding link from the Download Center (<http://www.trendmicro.com/download>) for updates to the product documentation.

## Document Conventions

The documentation uses the following conventions.

**TABLE 1. Document Conventions**

| CONVENTION  | DESCRIPTION   |
|---|---|
| UPPER CASE  | Acronyms, abbreviations, and names of certain commands and keys on the keyboard   |
| <b>Bold</b>   | Menus and menu commands, command buttons, tabs, and options   |
| <i>Italics</i>  | References to other documents   |
| Monospace   | Sample command lines, program code, web URLs, file names, and program output  |
| <b>Navigation &gt; Path</b>   | The navigation path to reach a particular screen<br>For example, <b>File &gt; Save</b> means, click <b>File</b> and then click <b>Save</b> on the interface |
|  <b>Note</b> | Configuration notes   |
|  <b>Tip</b>  | Recommendations or suggestions  |

| CONVENTION   | DESCRIPTION  |
|--|--|
|  <b>Important</b> | Information regarding required or default configuration settings and product limitations |
|  <b>WARNING!</b>  | Critical actions and configuration options   |

# Chapter 1

## Introduction

Trend Micro™ Mobile Security for Enterprise 9.6 is an integrated security solution for your mobile devices. Read this chapter to understand Mobile Security components, features and how they protect your mobile devices.

This chapter includes the following sections:

- *Understanding Mobile Threats on page 1-2*
- *About Trend Micro Mobile Security on page 1-2*
- *Architecture of Mobile Security System on page 1-2*
- *Components of Mobile Security System on page 1-3*
- *What's New in Release 9.5 on page 1-7*
- *Main Mobile Device Agent Features on page 1-9*
- *Supported Mobile Device OS Features on page 1-12*

## Understanding Mobile Threats

With the standardization of platforms and their increasing connectivity, mobile devices are susceptible to an increasing number of threats. The number of malware programs that run on mobile platforms is growing and more spam messages are sent through SMS. New sources of content, such as WAP and WAP Push are also used to deliver unwanted material.

Additionally, the theft of mobile devices may lead to the compromise of personal or sensitive data.

## About Trend Micro Mobile Security

Trend Micro™ Mobile Security for Enterprise is a comprehensive security solution for your mobile devices. Mobile Security incorporates the Trend Micro anti-malware technologies to effectively defend against the latest threats to mobile devices.

The integrated filtering functions enable Mobile Security to block unwanted network communication to mobile devices. Some of these unwanted network communications include: SMS messages, WAP push mails and data received through 3G/GPRS connections.

This version of Mobile Security is independent of OfficeScan™ and can be installed separately as a standalone application on a Windows computer.



### **WARNING!**

Trend Micro cannot guarantee compatibility between Mobile Security and file system encryption software. Software products that offer similar features, like anti-malware scanning and SMS management may be incompatible with Mobile Security.

---

## Architecture of Mobile Security System

Depending on your company needs, you can implement Mobile Security with different client-server communication methods. You can also choose to set up one or any combination of client-server communication methods in your network.



Trend Micro Mobile Security supports three different models of deployment:

- Enhanced Security Model (Dual Server Installation) with Cloud Communication Server
- Enhanced Security Model (Dual Server Installation) with Local Communication Server
- Basic Security Model (Single Server Installation)

Refer to the *Installation and Deployment Guide* for the details.

## Components of Mobile Security System

The following table provides the descriptions of the Mobile Security components.

**TABLE 1-1. Components of Mobile Security System**

| COMPONENT         | DESCRIPTION   | REQUIRED OR OPTIONAL |
|-------------------|---|----------------------|
| Management Server | The Management Server enables you to manage Mobile Device Agents from the administration web console. Once mobile devices are enrolled to the server, you can configure Mobile Device Agent policies and perform updates. | Required             |

| COMPONENT            | DESCRIPTION  | REQUIRED OR OPTIONAL |
|----------------------|--|----------------------|
| Communication Server | <p>The Communication Server handles communications between the Management Server and Mobile Device Agents.</p> <p>Trend Micro Mobile Security provides two types of Communication Server:</p> <ul style="list-style-type: none"> <li>• Local Communication Server (LCS)—this is a Communication Server deployed locally in your network.</li> <li>• Cloud Communication Server (CCS)—this is a Communication Server deployed in the cloud and you will not need to install this server. Trend Micro manages the Cloud Communication Server and you only need to connect to it from the Management Server.</li> </ul> <p>See <a href="#">Comparison Between Local and Communication Servers on page 1-6</a>.</p>  | Required             |
| Exchange Connector   | <p>Trend Micro Mobile Security uses Exchange Connector to communicate with the Microsoft Exchange server, detects all the mobile devices that use Exchange ActiveSync service, and displays them on Mobile Security web console.</p> <p>The Microsoft Exchange server Integration with Mobile Security enables the administrators to monitor the mobile devices that access the Microsoft Exchange server. Once the feature is enabled and configured, Mobile Security administrators can perform Remote Wipe and block the access to the Microsoft Exchange server for such mobile devices.</p> <p>The integration of Microsoft Exchange server with Mobile Security also enables the administrators to control the user access to cooperate data (such as, emails, calendar, contacts, and so on).</p> | Optional             |

| COMPONENT                 | DESCRIPTION   | REQUIRED OR OPTIONAL                              |
|---------------------------|---|---|
| Mobile Device Agent (MDA) | The Mobile Device Agent is installed on the managed Android and iOS mobile devices. The agent communicates with the Mobile Security Communication Server and executes the commands and policy settings on the mobile device.  | Required  |
| Microsoft SQL Server      | The Microsoft SQL Server hosts the databases for Mobile Security Management Server.   | Required  |
| Active Directory          | The Mobile Security Management Server imports users and groups from the Active Directory.   | Optional  |
| Certificate Authority     | The Certificate Authority manages security credentials and public and private keys for secure communication.  | Optional  |
| SCEP                      | <p>The Simple Certificate Enrollment Protocol (SCEP) is a communication protocol that provides a networked front end to a private certificate authority.</p> <p>In some environments, it is important to make sure that corporate settings and policies are protected from prying eyes. To provide this protection, iOS allows you to encrypt profiles so that they can be read only by a single device. An encrypted profile is just like a normal configuration profile except that the configuration profile payload is encrypted with the public key associated with the device's X.509 identity.</p> <p>The SCEP works with the Certificate Authority to issue certificates in large enterprises. It handles the issuing and revocation of digital certificates. The SCEP and Certificate Authority can be installed on the same server.</p> | Optional  |
| APNs Certificate          | The Mobile Security Communication Server communicates through the Apple Push Notification Service (APNs) to iOS devices.  | Required if you want to manage iOS mobile devices |

| COMPONENT       | DESCRIPTION  | REQUIRED OR OPTIONAL   |
|-----------------|--|--|
| SSL certificate | Trend Micro Mobile Security requires an SSL server certificate issued from a recognized Public Certificate Authority for the secure communication between mobile devices and Communication Server using HTTPS. | Required if you want to manage Windows Phone or iOS mobile devices |
| SMTP Server     | Connect SMTP server to make sure administrators can get reports from Mobile Security Management Server, and send invitations to users.   | Optional   |

## Comparison Between Local and Communication Servers

The following table provides the comparison between the Local Communication Server (LCS) and the Cloud Communication Server (CCS).

**TABLE 1-2. Comparison between Local and Cloud Communication Servers**

| FEATURES                             | CLOUD COMMUNICATION SERVER | LOCAL COMMUNICATION SERVER         |
|--------------------------------------|----------------------------|------------------------------------|
| Installation required                | No                         | Yes                                |
| User authentication method supported | Enrollment Key             | Active Directory or Enrollment Key |
| Agent Customization for Android      | Supported                  | Supported                          |
| Manage Windows Phone                 | Not supported              | Supported                          |

## What's New in this Release (9.6)

The following new features are available in Trend Micro Mobile Security 9.6:

| FEATURE                   | DESCRIPTION  |
|---------------------------|--|
| User Management           | Enables administrators to manage users and invitations separately.   |
| On-Demand Reports         | Administrators now have the option of generating reports as needed.  |
| Scheduled Scan            | Enables administrators to run the malware and security scans daily, weekly, or monthly based on the specified schedule.  |
| Security Scan for Android | In addition to the privacy scan, Mobile Security now supports the vulnerability scan and modified apps scan for increased security.                              |
| New Widgets               | This release introduces five new widgets that display information about the Android security scans and the iOS malware scan.                                     |
| New iOS App Version       | Administrators can choose to deploy a new version of the iOS app that only supports security scans and works with 3rd-party mobile device management (MDM) apps. |

## What's New in Release 9.5

The following new features are available in Trend Micro Mobile Security 9.5:

| FEATURE NAME  | DESCRIPTION  |
|---|--|
| Volume Purchase Program (VPP) Enhancements in iOS 9 | Enables administrators to assign application licenses to users or devices.       |
| Feature Lock for iOS 9 or later                     | New feature lock options available for mobile devices running on iOS 9 or later. |

| FEATURE NAME                         | DESCRIPTION   |
|--------------------------------------|---|
| Reports Enhancements                 | <p>The following enhancements are made in this release:</p> <ul style="list-style-type: none"> <li>• New HTML view for improved usability.</li> <li>• New charts provide more information on managed devices and applications.</li> </ul>   |
| Compliance Violation Details         | Compliance violation reasons are now displayed on the web console for each non-compliant mobile device.   |
| Web Console QR Code Enrollment       | Administrators can now enroll users from the web console using the new preset Enrollment Key QR code on the Device Enrollment Settings screen.  |
| Exchange Access Control Enhancements | <p>The following new options are available in this release:</p> <ul style="list-style-type: none"> <li>• Administrators can choose to automatically block unmanaged devices from accessing the Exchange Server</li> <li>• Administrators can choose to automatically enable the Auto Allow/Block Access option for all managed devices</li> </ul> |
| App Management Enhancement in iOS 9  | Unmanaged applications are installed as managed apps when users install them from the Enterprise App Store or when the administrator adds a required app to a policy.   |

## What's New in Release 9.3



The following new features are available in Trend Micro Mobile Security 9.3:

| FEATURE NAME                                 | DESCRIPTION  |
|--|--|
| Mobile Device Agent available on Google Play | From this release, users can download Android mobile device agent from Google Play store.                      |
| Facebook Scan for Android and iOS            | Scans your Facebook privacy settings, and provides recommendations on adjusting them to increase your privacy. |

| FEATURE NAME                                | DESCRIPTION  |
|---|--|
| Security Scan for iOS                       | Scans every app you have installed to filter out viruses, malicious apps, and spyware that can steal your information and cost you money.  |
| Scan from Cloud                             | Improves scanning from the cloud on Android mobile devices, when the mobile devices use a proxy server.  |
| Location Awareness for Android Feature Lock | Enables you to enforce the feature lock policy when the mobile device is in the range of an access point; and then restores the feature settings when the user leaves the range. |
| Added SMS Sender Support                    | Added support for SMS Sender to send notification text messages to users.  |

## Main Mobile Device Agent Features

| FEATURE NAME          | DESCRIPTION  |
|-----------------------|--|
| Anti-Malware Scanning | Mobile Security incorporates Trend Micro's anti-malware technology to effectively detect threats to prevent attackers from taking advantage of vulnerabilities on mobile devices. Mobile Security is specially designed to scan for mobile threats.  |
| Web Security          | As technology increases for mobile devices, the sophistication of mobile threats is also increasing. Trend Micro Mobile Security provides Web Reputation and Parental Controls to protect your mobile device from unsafe websites and the websites that may contain objectionable material for children, teenagers and other family members. You can modify your Web Reputation and Parental Controls setting levels as per your desired settings. Mobile Security also maintains the log of the websites that were blocked by Web Reputation or Parental Controls in their specific logs. |

| FEATURE NAME   | DESCRIPTION  |
|----------------|--|
| SMS Anti-Spam  | <p>Mobile devices often receive unwanted messages or spam through SMS messaging. To filter unwanted SMS messages into a spam folder, you can specify the phone numbers from which all SMS messages will be considered spam or you can specify a list of approved phone numbers and configure Mobile Security to filter all messages from senders that are not in the approved list. You can also filter unidentified SMS messages or messages without sender numbers. Your mobile device will automatically store these messages to the spam folder in your inbox.</p> <hr/> <p> <b>Note</b><br/>The SMS Anti-Spam feature is not available on mobile devices without phone capabilities.</p> |
| Call Filtering | <p>Mobile Security enables you to filter incoming or outgoing calls from the server. You can configure Mobile Security to block incoming calls from certain phone numbers or you can specify a list of approved phone numbers to which the calls may be made from the mobile device. Mobile Security also enables mobile device users to specify their own Blocked or Approved list to filter unwanted incoming calls.</p> <hr/> <p> <b>Note</b><br/>The Call Filtering feature is not available on mobile devices without phone capabilities.</p>  |






| FEATURE NAME        | DESCRIPTION   |
|---------------------|---|
| WAP Push Protection | <p>WAP Push is a powerful method of delivering content to mobile devices automatically. To initiate the delivery of content, special messages called WAP Push messages are sent to users. These messages typically contain information about the content and serve as a method by which users can accept or refuse the content.</p> <p>Malicious users have been known to send out inaccurate or uninformative WAP Push messages to trick users into accepting content that can include unwanted applications, system settings, and even malware. Mobile Security lets you use a list of trusted senders to filter WAP Push messages and prevent unwanted content from reaching mobile devices.</p> <p>The WAP Push protection feature is not available on mobile devices without phone capabilities.</p> |
| Authentication      | <p>After installing the Mobile Device Agent, the mobile device user need to provide the authentication information to enroll the mobile devices with the Mobile Security Management Server.</p>   |
| Regular Updates     | <p>To protect against the most current threats, you can either update Mobile Security manually or configure it to update automatically. To save cost, you can also set a different update frequency for the mobile devices that are in "roaming". Updates include component updates and Mobile Security program patch updates.</p>  |




| FEATURE NAME | DESCRIPTION  |
|--------------|--|
| Logs         | <p>The following Mobile Device Agent logs are available on the Management Server:</p> <ul style="list-style-type: none"> <li>• malware protection log</li> <li>• web threat protection log</li> <li>• event log</li> <li>• violation log</li> </ul> <p>You can view the following logs on mobile devices:</p> <ul style="list-style-type: none"> <li>• Android: <ul style="list-style-type: none"> <li>• malware scan history</li> <li>• privacy scan history</li> <li>• web blocking history</li> <li>• call blocking history</li> <li>• text blocking history</li> <li>• update history</li> </ul> </li> </ul> |




## Supported Mobile Device OS Features




The following table shows the list of features that Trend Micro Mobile Security supports on each platform.




**TABLE 1-3. Trend Micro Mobile Security 9.6 Feature Matrix**




| POLICY       | FEATURES | SETTINGS                     |  |  |  |
|--------------|----------|------------------------------|---|--|---|
| Provisioning | Wi-Fi    | Standard Wi-Fi configuration | ●   | ●  |   |
|              |          | Legacy hotspot configuration | ●   |  |   |
|              |          | Hotspot 2.0 configuration    | ●   |  |   |




| POLICY          | FEATURES                 | SETTINGS                          |  |  |  |
|-----------------|--------------------------|-----------------------------------|---|---|---|
|                 | Exchange ActiveSync      | Exchange ActiveSync configuration | ●   |   |   |
|                 | VPN                      | VPN configuration                 | ●   |   |   |
|                 | Global HTTP Proxy        | Global HTTP Proxy configuration   | ●   |   |   |
|                 | Single Sign-on           | Single sign-on configuration      | ●   |   |   |
|                 | Certificate              | Certificate configuration         | ●   |   |   |
|                 | Cellular network         | Cellular network configuration    | ●   |   |   |
|                 | AirPlay/AirPrint         | AirPlay/AirPrint configuration    | ●   |   |   |
|                 | Themes (Supervised only) | Wallpaper configuration           | ●   |   |   |
|                 |                          | Font configuration                | ●   |   |   |
|                 | Managed Domains          | Unmarked Email Domains            | ●   |   |   |
|                 |                          | Managed Safari Web Domains        | ●   |   |   |
| Device Security | Malware Protection       | Real-time scan                    |   | ●   |   |
|                 |                          | Scan after pattern update         |   | ●   |   |
|                 |                          | Manual scan                       | ●   | ●   |   |
|                 | Privacy Protection       | Privacy scan                      |   | ●   |   |
|                 |                          | Privacy scan log upload           |   | ●   |   |
|                 |                          | Facebook scan                     | ●   | ●   |   |
| Data Protection | Spam SMS Prevention      | Server-side control               |   | ●   |   |
|                 |                          | Use blocked list                  |   | ●   |   |
|                 |                          | Use approved list                 |   | ●   |   |

| POLICY                  | FEATURES                 | SETTINGS                     |  |  |  |   |
|-------------------------|--------------------------|------------------------------|---|--|---|---|
|                         | Spam WAP Push Prevention | Server-side control          |   | ●  |   |   |
|                         |                          | Use approved list            |   | ●  |   |   |
|                         | Call Filtering           | Server-side control          |   | ●  |   |   |
|                         |                          | Use blocked list             |   | ●  |   |   |
|                         |                          | Use approved list            |   | ●  |   |   |
|                         | Web Threat Protection    | Server-side control          |   | ●  |   |   |
|                         |                          | Use blocked list             |   | ●  |   |   |
|                         |                          | Use approved list            |   | ●  |   |   |
|                         |                          | Allow specific websites only | ●   |  |   |   |
|                         |                          | Allow limited adult content  | ●   |  |   |   |
|                         | Data Protection          | Password Settings            | Use password for login  | ●  | ●   | ● |
|                         |                          |                              | Allow simple password   | ●  | ●   | ● |
|                         |                          |                              | Require alphanumeric password   | ●  | ●   | ● |
|                         |                          |                              | Minimum password length   | ●  | ●   | ● |
|                         |                          |                              | Password expiration   | ●  | ●   | ● |
| Password history        |                          |                              | ●   | ●  | ●   |   |
| Auto-lock               |                          |                              | ●   | ●  | ●   |   |
| Password failure action |                          |                              | ●   | ●  | ●   |   |
| Feature Lock            |                          | Camera                       | ●   | ●  |   |   |
|                         |                          | FaceTime                     | ●   |  |   |   |
|                         | Screen capture           | ●                            |   |  |   |   |




| POLICY | FEATURES | SETTINGS                             |  |  |  |
|--------|----------|--------------------------------------|---|---|---|
|        |          | Apps installation                    | ●   |   |   |
|        |          | Sync while roaming                   | ●   |   |   |
|        |          | Voice dialing                        | ●   |   |   |
|        |          | In-app purchase                      | ●   |   |   |
|        |          | Multiplayer gaming                   | ●   |   |   |
|        |          | Adding game center friends           | ●   |   |   |
|        |          | Game Center (Supervised Only)        | ●   |   |   |
|        |          | Force encrypted backups              | ●   |   |   |
|        |          | Explicit music, podcast and iTunes U | ●   |   |   |
|        |          | Passbook while device is locked      | ●   |   |   |
|        |          | Bluetooth and Bluetooth discovery    |   | ●   |   |
|        |          | WLAN/Wi-Fi                           |   | ●   |   |
|        |          | 3G data network                      |   | ●   |   |
|        |          | Tethering                            |   | ●   |   |
|        |          | Developer mode                       |   | ●   |   |
|        |          | Speaker/speakerphone/microphone      |   |   |   |
|        |          | Restrict memory cards                |   | ●   |   |
|        |          | Siri                                 | ●   |   |   |
|        |          | Siri while device is locked          | ●   |   |   |




| POLICY | FEATURES | SETTINGS  |  |  |  |
|--------|----------|---|---|--|---|
|        |          | Enable profanity filter                         | ●   |  |   |
|        |          | Enable access to iCloud services                | ●   |  |   |
|        |          | Cloud backup                                    | ●   |  |   |
|        |          | Cloud document sync                             | ●   |  |   |
|        |          | Photo Stream                                    | ●   |  |   |
|        |          | Shared Photo Streams                            | ●   |  |   |
|        |          | Diagnostic data                                 | ●   |  |   |
|        |          | Accept untrusted Transport Layer Security (TLS) | ●   |  |   |
|        |          | Force iTunes to store password                  | ●   |  |   |
|        |          | YouTube   | ●   |  |   |
|        |          | Open documents from managed apps in other apps  | ●   |  |   |
|        |          | Open documents from other apps in managed apps  | ●   |  |   |
|        |          | iTunes  | ●   |  |   |
|        |          | Safari Web browser                              | ●   |  |   |
|        |          | AutoFill  | ●   |  |   |
|        |          | JavaScript                                      | ●   |  |   |
|        |          | Popups  | ●   |  |   |
|        |          | Force fraud warning                             | ●   |  |   |
|        |          | Accept cookies                                  | ●   |  |   |




| POLICY | FEATURES | SETTINGS  |  |  |  |
|--------|----------|---|---|---|---|
|        |          | Removing apps (Supervised only)                           | ●   |   |   |
|        |          | Bookstore (Supervised only)                               | ●   |   |   |
|        |          | Erotica (Supervised only)                                 | ●   |   |   |
|        |          | Configuration Profile Installation (Supervised only)      | ●   |   |   |
|        |          | iMessage (Supervised only)                                | ●   |   |   |
|        |          | Ratings region  | ●   |   |   |
|        |          | Movies  | ●   |   |   |
|        |          | TV Shows  | ●   |   |   |
|        |          | Apps  | ●   |   |   |
|        |          | Account modification (Supervised only)                    | ●   |   |   |
|        |          | AirDrop (Supervised only)                                 | ●   |   |   |
|        |          | Applications cellular data modification (Supervised only) | ●   |   |   |
|        |          | Assistant (Siri) user-generated content (Supervised only) | ●   |   |   |
|        |          | Cloud keychain synchronization                            | ●   |   |   |
|        |          | Find My Friends modification (Supervised only)            | ●   |   |   |
|        |          | Fingerprint for unlocking a device                        | ●   |   |   |
|        |          | Host pairing (Supervised only)                            | ●   |   |   |

| POLICY | FEATURES | SETTINGS  |  |  |  |
|--------|----------|---|---|--|---|
|        |          | Lock screen control center                              | ●   |  |   |
|        |          | Lock screen notifications view                          | ●   |  |   |
|        |          | Lockscreen today view                                   | ●   |  |   |
|        |          | Over the Air Public Key Infrastructure (OTAPKI) updates | ●   |  |   |
|        |          | Force limit ad tracking                                 | ●   |  |   |
|        |          | Force AirPlay outgoing requests pairing password        | ●   |  |   |
|        |          | Allow managed apps to store data in iCloud              | ●   |  |   |
|        |          | Allow backup of enterprise books                        | ●   |  |   |
|        |          | Allow configuration restrictions                        | ●   |  |   |
|        |          | Allow Erase All Content and Settings                    | ●   |  |   |
|        |          | Allow Handoff   | ●   |  |   |
|        |          | Allow Internet results in spotlight                     | ●   |  |   |
|        |          | Allow notes and highlights sync for enterprise books    | ●   |  |   |
|        |          | Allow sharing of managed documents using AirDrop        | ●   |  |   |
|        |          | Allow iCloud Photo Library                              | ●   |  |   |
|        |          | Allow installing apps from device                       | ●   |  |   |



| POLICY                 | FEATURES                      | SETTINGS                            |  |  |  |
|------------------------|-------------------------------|-------------------------------------|---|---|---|
|                        |                               | Allow keyboard shortcuts            | ●   |   |   |
|                        |                               | Allow paired Apple Watch            | ●   |   |   |
|                        |                               | Allow passcode modification         | ●   |   |   |
|                        |                               | Allow device name modification      | ●   |   |   |
|                        |                               | Allow wallpaper modification        | ●   |   |   |
|                        |                               | Allow automatic downloading of apps | ●   |   |   |
|                        |                               | Allow trusting of enterprise apps   | ●   |   |   |
|                        | Compliance Settings           | Rooted/Jailbroken                   | ●   | ●   |   |
|                        |                               | Unencrypted                         | ●   | ●   |   |
|                        |                               | OS version check                    | ●   | ●   |   |
| Application Management | Application Monitor & Control | Required Applications               | ●   | ●   |   |
|                        |                               | Permitted Applications              | ●   | ●   |   |
|                        |                               | Lock to App (Supervised only)       | ●   |   |   |
|                        | Volume Purchasing Program     | Volume Purchasing Program           | ●   |   |   |
| Remote Control         | Register                      |                                     | ●   | ●   |   |
|                        | Update                        |                                     | ●   | ●   |   |
|                        | Anti-theft                    | Remote locate                       |   | ●   |   |
|                        |                               | Remote lock                         | ●   | ●   |   |
|                        |                               | Remote wipe                         | ●   | ●   | ●   |

| POLICY                        | FEATURES                    | SETTINGS   |  |  |  |
|-------------------------------|-----------------------------|--|---|--|---|
|                               | Samsung KNOX Workspace      | Reset password                                   | ●   | ●  |   |
|                               |                             | Create container                                 |   | ●  |   |
|                               |                             | Remove container                                 |   | ●  |   |
|                               |                             | Lock container                                   |   | ●  |   |
|                               |                             | Unlock container                                 |   | ●  |   |
|                               |                             | Reset container password                         |   | ●  |   |
| Samsung KNOX Workspace Policy | Container account setting   | Blocked list                                     |   | ●  |   |
|                               |                             | Approved list                                    |   | ●  |   |
|                               | Restriction settings        | Allow users to use camera                        |   | ●  |   |
|                               |                             | Allow display the share via list of applications |   | ●  |   |
|                               | Browser settings            | Enable auto fill setting                         |   | ●  |   |
|                               |                             | Enable cookies setting                           |   | ●  |   |
|                               |                             | Enable popups setting                            |   | ●  |   |
|                               |                             | Enable force fraud warning setting               |   | ●  |   |
|                               |                             | Enable JavaScript setting                        |   | ●  |   |
|                               |                             | Enable Web Proxy                                 |   | ●  |   |
| Samsung KNOX Workspace Policy | Container password settings | Enable password visibility                       |   | ●  |   |
|                               |                             | Minimum password change length                   |   | ●  |   |
|                               |                             | Minimum password length                          |   | ●  |   |
|                               |                             | Maximum inactivity timeout                       |   | ●  |   |

| POLICY | FEATURES                  | SETTINGS  |  |  |  |
|--------|---------------------------|---|---|---|---|
|        |                           | Maximum number of failed attempts                           |   | ●   |   |
|        |                           | Password history  |   | ●   |   |
|        |                           | Maximum password age  |   | ●   |   |
|        |                           | Minimum number of special characters required in a password |   | ●   |   |
|        |                           | Password complexity   |   | ●   |   |
|        | Application settings      | Installation approved list                                  |   | ●   |   |
|        | Installation blocked list |   | ●   |   |   |
|        | Required applications     |   | ●   |   |   |
|        | Disabled applications     |   | ●   |   |   |
|        | Device Enrollment Program |   |   | ●   |   |



## Chapter 2

# Getting Started with Mobile Security

This chapter helps you start using Mobile Security and provides you the basic usage instructions. Before you proceed, be sure to install the Management Server, Communication Server, and the Mobile Device Agent on mobile devices.

This chapter includes the following sections:

- *Accessing the Administration Web Console on page 2-2*
- *Dashboard Information on page 2-5*
- *Administration Settings on page 2-10*
- *Command Queue Management on page 2-18*
- *Exchange Server Integration on page 2-20*
- *Managing Certificates on page 2-21*

## Administration Web Console

You can access the configuration screens through the Mobile Security administration web console.

The web console is the central point for managing and monitoring Mobile Security throughout your corporate network. The console comes with a set of default settings and values that you can configure based on your security requirements and specifications.

You can use the web console to do the following:

- Manage Mobile Device Agents installed on mobile devices
- Configure security policies for Mobile Device Agents
- Configure scan settings on a single or multiple mobile devices
- Group devices into logical groups for easy configuration and management
- View registration and update information

## Accessing the Administration Web Console

---

### Procedure

1. Log on to the administration web console using the following URL structure:

```
https://  
<External_domain_name_or_IP_address>:<HTTPS_port>/mdm/web
```



### Note

Replace <External\_domain\_name\_or\_IP\_address> with the actual IP address, and <HTTPS\_port> with the actual port number of the Management Server.

---

The following screen appears.



**FIGURE 2-1. Administration Web console login screen**

2. Type a user name and password in the fields provided and click **Log In**.



**Note**

The default **User Name** for administration web console is “root” and the **Password** is “mobilesecurity”.

Make sure that you change the administrator password for the user "root" after your first sign in. See [Editing an Administrator Account on page 2-15](#) for the procedure.

---



**Important**

If you are using Internet Explorer to access the administration web console, make sure the following:

- the **Compatibility View for Websites** options is turned off. See [Turning Off Compatibility Mode in Internet Explorer on page 2-4](#) for details.
  - the JavaScript is enabled on your browser.
-

**Note**

If you are unable to access the administration web console in Windows 2012 using Internet Explorer 10 in Metro mode, verify that the **Enhanced Protected Mode** option is disabled in Internet Explorer.

---

## Turning Off Compatibility Mode in Internet Explorer

Trend Micro Mobile Security does not support **Compatibility View** on Internet Explorer. If you are using Internet Explorer to access the Mobile Security administration web console, turn off the web browser's Compatibility View for the website, if it is enabled.

---

### Procedure

1. Open Internet Explorer and click **Tools > Compatibility View settings**.  
The **Compatibility View Settings** window displays.
  2. If the administration console is added to the **Compatibility View** list, select the website and click **Remove**.
  3. Clear **Display intranet sites in Compatibility View** and **Display all websites in Compatibility View** checkboxes, and then click **Close**.
- 

## Product License

After the Evaluation version license expires, all program features will be disabled. A Full license version enables you to continue using all features, even after the license expires. It's important to note however, that the Mobile Device Agent will be unable to obtain updates from the server, making anti-malware components susceptible to the latest security risks.

If your license expires, you will need to register the Mobile Security Management Server with a new Activation Code. Consult your local Trend Micro sales representative for more information.



To download updates and allow remote management, Mobile Device Agent must enroll to the Mobile Security Management Server. For instructions to manually enroll Mobile Device Agent on mobile devices, refer to the *Installation And Deployment Guide*.

To view license upgrade instructions for Management Server, click the **View license upgrade instructions** link in Mobile Security **Product License** screen.

## Dashboard Information

The **Dashboard** screen displays first when you access the Management Server. This screen provides an overview of the mobile device registration status and component details.

The dashboard screen is divided into five tabs:

- **Summary**—shows the device health status and device operating system summary.
- **Security**—shows the lists of top five (5) security threats, top five (5) blocked websites, iOS malware scan results, and Android security scan results.
- **Health**—shows the components and policy update and mobile device health status. In this category, you can:
  - View mobile devices' status:
    - **Healthy**—shows that the device is enrolled to the Mobile Security Management Server and the components and policies on the mobile device are up-to-date.
    - **Non-Compliant**—shows that the device is enrolled to the Mobile Security Management Server, but does not comply with the server policies.
    - **Out of Sync**—shows that the device is enrolled to the Mobile Security Management Server, but either the components or the polices are out-of-date.
    - **Inactive**—shows that the device is not yet enrolled to the Mobile Security Management Server.

- View the total number of enrolled and unregistered mobile devices managed by Mobile Security.

A mobile device may remain unregistered if a connection to the Communication Server is unsuccessful.

- View mobile device program patch and component update status:
  - **Current Version**—the current version number of the Mobile Device Agent or components on the Mobile Security Management Server
  - **Up-to-date**—the number of mobile device with updated Mobile Device Agent version or component
  - **Out-of-date**—the number of mobile devices that are using an out-of-date component
  - **Update Rate**—the percentage of mobile devices using the latest component version
  - **Upgraded**—the number of mobile devices using the latest Mobile Device Agent version
  - **Not Upgraded**— the number of mobile devices that have not upgraded to use the latest Mobile Device Agent version
  - **Upgrade Rate**—the percentage of mobile devices using the latest Mobile Device Agent
- View server update status:
  - **Server**—the name of the module
  - **Address**—the domain name or IP address of the machine hosting the module
  - **Current Version**—the current version number of the Mobile Security Management Server modules
  - **Last Updated**—the time and date of the last update
- **Inventory**—shows mobile device operating system version summary, telephone carriers summary, mobile device vendors summary and top 10 applications installed on mobile devices.

- **Compliance**—shows the app control, encryption and jailbreak/root status of mobile devices. In this category, you can:
  - View the mobile device jailbreak/root status:
    - **Jailbroken/Rooted**—the number of mobile devices that are jailbroken/rooted
    - **Not Jailbroken/Rooted**—the number of mobile devices that are not jailbroken/rooted
  - View the mobile device encryption status:
    - **Encrypted**—the number of mobile devices that are encrypted
    - **Not Encrypted**—the number of mobile devices that are not encrypted
  - View the mobile device application control status:
    - **Compliant**—the number of mobile devices that comply with the Mobile Security’s compliance and application control policy
    - **Not Compliant**—the number of mobile devices that do not comply with the Mobile Security’s compliance and application control policy

**Note**

On each of the widgets on the **Dashboard** screen, you can either select **All**, or the group name from the drop-down list to display the information of the relevant devices.

---


## Customizing the Dashboard

Mobile Security enables you to customize the **Dashboard** information according to your needs and requirements.

### Adding a New Tab

---

#### Procedure


1. On the **Dashboard** screen, click the  button.

2. On the **New Tab** pop-up window, do the following:
    - **Title:** type the tab name.
    - **Layout:** select the layout for the widgets displayed on the tab.
    - **Auto-fit:** select **On** or **Off** to enable or disable the setting for the widgets on the tab.
  3. Click **Save**.
- 

## Removing a Tab

---

### Procedure

1. Click the tab, and then click the  button displayed on the tab.
  2. Click **OK** on the confirmation pop-up dialog.
- 

## Adding Widgets

---

### Procedure

1. On the **Dashboard** screen, click the tab on which you want to add widgets.
2. Click **Add Widgets** on the top-right of the tab.  
  
The **Add Widgets** screen displays.
3. Select the category from the left menu and/or type the keywords in the search field to display the relevant widgets list.
4. Select the widgets that you want to add, and then click **Add**.


The selected widgets appear on the tab on the **Dashboard**.

---

## Removing Widgets

---

### Procedure

1. On the **Dashboard** screen, click the tab from which you want to remove widgets.
  2. On the widget that you want to remove, click  on the top-right of the widget.
- 

## Changing Widget's Position

---


### Procedure

1. On the **Dashboard** screen, click the tab whose widgets you want to rearrange.
  2. Click and hold the widget title bar, then drag and drop it to the new position.
- 

## Refreshing the Information on the Widgets

---

### Procedure

1. On the **Dashboard** screen, click the tab whose widget you want to refresh.
  2. On the widget that you want to refresh, click  on the top-right of the widget.
- 

## Viewing or Modifying Tab Settings

---

### Procedure

1. On the **Dashboard** screen, click the tab whose settings you want to view or modify.
  2. Click **Tab Settings**.
  3. Modify the settings as required, and then click **Save**.
-

# Administration Settings

## Configuring Active Directory (AD) Settings

Trend Micro Mobile Security enables you to configure user authorization based on the Active Directory (AD). You can also add mobile devices to the device list using your AD. Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

## Configuring User Authentication

Trend Micro Mobile Security enables you to configure user authentication based on the Active Directory (AD) or through an Enrollment Key. Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

## Configuring Database Settings

Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

## Configuring Communication Server Settings

Refer to the *Initial Server Setup* section in the *Installation and Deployment Guide* for the detailed configuration steps.

## Managing Administrator Accounts

The **Administrator Account Management** screen enables you to create user accounts with different access role for the Management Server.

## Default Administrator Account Name and Role

The default administrator account is “root” (password: “mobilesecurity”). The root account cannot be deleted and can only be modified. See [Editing an Administrator Account on page 2-15](#) for the detailed procedure.

**TABLE 2-1. The root account properties**

| ROOT ACCOUNT PROPERTIES |                                 | CAN BE MODIFIED? |
|-------------------------|---------------------------------|------------------|
| Administrator Accounts  | Account name                    | No               |
|                         | Full name                       | Yes              |
|                         | Password                        | Yes              |
|                         | Email address                   | Yes              |
|                         | Mobile phone number             | Yes              |
| Administrator Roles     | Administrator role modification | No               |

The default administrator role is **Super Administrator**, which has the maximum access to all settings. The **Super Administrator** role cannot be deleted and can only be modified. See [Editing an Administrator Role on page 2-17](#) for the detailed procedure.

**TABLE 2-2. The Super Administrator role properties**

| SUPER ADMINISTRATOR ROLE PROPERTIES |                    | CAN BE MODIFIED? |
|-------------------------------------|--------------------|------------------|
| Role Details                        | Administrator role | No               |
|                                     | Description        | Yes              |
| Group Management Control            | Managed Groups     | No               |
| Exchange Server Domain Control      | Domain selection   | No               |

**TABLE 2-3. Access rights for Super Administrator and a Group Administrator**

| <b>SERVER COMPONENTS</b> | <b>PERMISSIONS</b>               | <b>SUPER ADMINISTRATOR</b> | <b>GROUP ADMINISTRATOR</b>                    |
|--------------------------|----------------------------------|----------------------------|---|
| Administration           | Updates                          | Supported                  | Not supported                                 |
|                          | Administrator Account Management | Can modify all the account | Can only modify own account information       |
|                          | Device Enrollment Settings       | Supported                  | Not supported                                 |
|                          | Certificate Management           | Supported                  | Supported                                     |
|                          | Command Queue Management         | Can manage all commands    | Can only view commands for the related groups |
|                          | Database Settings                | Supported                  | Not supported                                 |
|                          | Communication Server Settings    | Supported                  | Not supported                                 |
|                          | Active Directory Settings        | Supported                  | Not supported                                 |
|                          | Management Server Settings       | Supported                  | Not supported                                 |
|                          | Exchange Server Integration      | Supported                  | Not supported                                 |
|                          | Configuration and Verification   | Supported                  | Not supported                                 |
|                          | Product License                  | Supported                  | Not supported                                 |



| <b>SERVER COMPONENTS</b>  | <b>PERMISSIONS</b>                  | <b>SUPER ADMINISTRATOR</b> | <b>GROUP ADMINISTRATOR</b>        |
|---------------------------|-------------------------------------|----------------------------|-----------------------------------|
| Notifications/<br>Reports | Log Query                           | All the groups             | Managed groups only               |
|                           | Log Maintenance                     | All the groups             | Managed groups only               |
|                           | Administrator Notifications/Reports | Supported                  | Not supported                     |
|                           | User Notifications                  | Supported                  | Not supported                     |
|                           | Settings                            | Supported                  | Not supported                     |
| Apps                      | Enterprise App Store                | Supported                  | Not supported                     |
|                           | Installed Apps                      | Supported                  | Supported for managed groups only |
| Policy                    | Create a policy                     | Supported                  | Supported for managed groups only |
|                           | View a policy                       | Supported                  | Supported for managed groups only |
|                           | Copy a policy                       | Supported                  | Supported for managed groups only |
|                           | Delete a policy                     | Supported                  | Supported for managed groups only |

| SERVER COMPONENTS | PERMISSIONS                 | SUPER ADMINISTRATOR | GROUP ADMINISTRATOR               |
|-------------------|-----------------------------|---------------------|-----------------------------------|
| Devices           | View devices                | Supported           | Supported for managed groups only |
|                   | Add group                   | Supported           | Supported                         |
|                   | Exchange ActiveSync Devices | Supported           | Supported for managed groups only |
| Users             | Invite users                | Supported           | Supported for managed groups only |

## Adding Administrator Accounts

### Procedure

1. On the Mobile Security administration web console, go to **Administration > Administrator Account Management**.
2. On the **Administrator Accounts** tab, click **Create** to add a new account.  
The **Create Administrator Account** screen appears.
3. Under section **Account Details**, do one of the following:
  - Select **Trend Micro Mobile Security User**, and specify the following user account details:
    - **Account name:** name used to log on to the Management Server.
    - **Full name:** the user's full name.
    - **Password** (and **Confirm Password**).
    - **Email address:** the user's email address.
    - **Mobile phone number:** the user's phone number.

- Select **Active Directory user**, and do the following:
  - a. Type the user name in the search field and click **Search**.
  - b. Select the user name from the list on the left and click > to move the user to the **Selected users** list on the right.

**Note**

To remove the user from the **Selected users** list on the right, select the user name and click <.

You can also select multiple users at the same time by holding Ctrl or Shift keys while clicking on the username.

---

4. Under section **Administrator Role**, select the role from the **Choose the administrator role:** drop-down list.

See *Creating an Administrator Role on page 2-16* for the procedure for creating administrator roles

5. Click **Save**.
- 

## Editing an Administrator Account

---

### Procedure

1. On the Mobile Security administration web console, go to **Administration > Administrator Account Management**.
2. On the **Administrator Accounts** tab, click **Create** to add a new account.  
The **Edit Administrator Account** screen appears.
3. Modify the administrator account details and access role as required.
  - **Account Details**
    - **Account name:** name used to log on to the Management Server.
    - **Full name:** the user's full name.

- **Email address:** the user's email address.
- **Mobile phone number:** the user's phone number.
- **Password:** click **Reset Password** to change the user account password, type the new password in the **New Password** and **Confirm Password** fields, and click **Save**.
- **Administrator Role**
  - **Choose the administrator role:** select the administrator role from the drop-down list.

For the procedure to create an administrator role, see [Creating an Administrator Role on page 2-16](#).

4. Click **Save**.
- 

## Deleting an Administrator Account

---

### Procedure

1. On the Mobile Security administration web console, go to **Administration > Administrator Account Management**.
2. On the **Administrator Accounts** tab, select the administrator accounts that you want to delete, and then click **Delete**.

A confirmation message appears.

---

## Creating an Administrator Role

---

### Procedure

1. On the Mobile Security administration web console, go to **Administration > Administrator Account Management**.
2. On the **Administrator Roles** tab, click **Create**.

The **Create Administrator Role** screen appears.

3. Under section **Role Details**, provide the following information:
    - Administrator Role
    - Description
  4. Under section **Group Management Control** select the mobile device groups that this administrator role can manage.
  5. Click **Save**
- 

## Editing an Administrator Role

---

### Procedure

1. On the Mobile Security administration web console, go to **Administration > Administrator Account Management**.
  2. On the **Administrator Roles** tab, click **Create**.

The **Create Administrator Role** screen appears.
  3. Modify the role details as required and then click **Save**.
- 

## Deleting an Administrator Role

---

### Procedure

1. On the Mobile Security administration web console, go to **Administration > Administrator Account Management**.
  2. On the **Administrator Roles** tab, select the administrator role you want to delete, and click **Delete**.

A confirmation message appears.
-

## Changing Administrator Password

Refer to the topic [Editing an Administrator Account on page 2-15](#) for the procedure of changing the administrator account password.

## Command Queue Management

Mobile Security keeps a record of all the commands you have executed from the web console and enables you to cancel or resend a command, if required. You can also remove the commands that have already been executed and are not required to be displayed on the list.

To access the **Command Queue Management** screen, go to **Administration > Command Queue Management**.

The following table describes all the command statuses on the **Command Queue Management** screen.

| COMMAND STATUS         | DESCRIPTION  |
|------------------------|--|
| Waiting to Send        | The Mobile Security Management Server is in the process of sending the command to mobile device.<br>You can cancel the command while it is in this status. |
| Waiting Acknowledgment | The Mobile Security Management Server has sent the command to mobile device and is waiting for the acknowledgement from the mobile device.                 |
| Unsuccessful           | Unable to execute the command on mobile device.  |
| Successful             | The command has been executed successfully on the mobile device.   |
| Canceled               | The command has been canceled before it was executed on the mobile device.   |

To keep the size of commands from occupying too much space on your hard disk, delete the commands manually or configure Mobile Security administration web console

to delete the commands automatically based on a schedule in the **Command Queue Maintenance** screen.

---

## Configuring Schedule for Deleting Old Commands

---

### Procedure

1. Click **Administration > Command Queue Management**.  
The **Command Queue Management** screen displays.
  2. On the **Command Queue Maintenance** tab, select **Enable scheduled deletion of commands**.
  3. Specify the number of days old commands you want to delete.
  4. Specify the commands queue deletion frequency and time.
  5. Click **Save**.
- 

## Deleting Old Commands Manually

---

### Procedure

1. Click **Administration > Command Queue Management**.  
The **Command Queue Management** screen displays.
  2. On the **Command Queue Maintenance** tab, select **Enable scheduled deletion of commands**.
  3. Specify the number of days old commands you want to delete.
  4. Click **Delete Now**.
-

# Exchange Server Integration

## Configuring Exchange Server Integration Settings

Refer to the topic *Configuring Exchange Server Integration Settings* in the *Installation and Deployment Guide* for the detailed configuration steps.

## Configuring Exchange Connector

You can configure the Exchange Connector to update automatically whenever a higher version is available.

---

### Procedure

1. On the computer where Exchange Connector is installed, click the **Show hidden icons** button in the system tray on the Windows taskbar (near the system clock).
  2. Right-click the **Exchange Connector** icon, and then click **About Trend Micro Mobile Security-Exchange Connector**.  
**About Trend Micro Mobile Security-Exchange Connector** screen appears.
  3. Configure the following:
    - **Enable automatic upgrade**—when selected, the Exchange Connector automatically upgrades to a new version whenever it is available.
    - **Server Address**—Mobile Security Management Server IP address.
    - **HTTPS Port**—Mobile Security Management Server HTTPS port number for the administration web console.
-



## Managing Certificates

Use the **Certificate Management** screen to upload .pfx, .p12, .cer, .crt, .der certificates to the Mobile Security Management Server.

### Uploading a Certificate

---

#### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Administration > Certificate Management**.
  3. Click **Add**.  
The **Add certificate** window appears.
  4. Click **Choose File** and then select a .pfx, .p12, .cer, .crt, .der certificate file.
  5. Type the certificate password in the **Password** field.
  6. Click **Save**.
- 

### Deleting a Certificate

---

#### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Administration > Certificate Management**.
  3. Select the certificates that you want to delete, and then click **Delete**.
-



# Chapter 3

## Managing Mobile Devices

This chapter helps you start using Mobile Security. It provides basic setup and usage instructions. Before you proceed, be sure to install the Management Server, Communication Server, and the Mobile Device Agent on mobile devices.

The chapter includes the following sections:

- *Managed Devices Tab on page 3-2*
- *Managing Groups on page 3-3*
- *Managing Mobile Devices on page 3-4*
- *Mobile Device Status on page 3-8*
- *Mobile Device Agent Tasks on page 3-10*
- *Updating Mobile Device Agents on page 3-10*
- *Lost Device Protection on page 3-11*
- *Resetting Password Remotely on page 3-14*
- *Exchange ActiveSync Devices Tab on page 3-18*
- *Device Enrollment Program Tab on page 3-21*
- *Integration with Trend Micro Control Manager on page 3-25*

## Managed Devices Tab

The **Managed Devices** tab on the **Devices** screen enables you to perform tasks related to the settings, organization or searching of Mobile Device Agents. The toolbar above the device tree viewer lets you perform the following tasks:

- configure the device tree (such as creating, deleting, or renaming groups and creating or deleting Mobile Device Agents)
- search for and display Mobile Device Agent status
- on-demand Mobile Device Agent component update, wipe/lock/locate remote device, and update policy
- configure Mobile Device Agents information
- export data for further analysis or backup

## Groups in Mobile Security

Mobile Security Management Server automatically creates a root group **Mobile Devices** with the following two sub-groups:

- **default**—this group contains Mobile Device Agents that do not belong to any other group. You cannot delete or rename the **default** group in the Mobile Security device tree.
- **unauthorized**—Mobile Security Management Server automatically creates this group if **Device Authentication** is enabled in **Device Enrollment Settings**, and a list of mobile devices is used to authenticate. If there is an enrolled mobile device that is not in the list of mobile devices, Mobile Security moves such mobile device to the **unauthorized** group. Mobile Security also creates other groups and regroups all mobile devices according to the list that you use.

**Note**

- If you enable **Device Authentication** in **Device Enrollment Settings**, and upload a blank mobile device list for authentication, Mobile Security will move all the current enrolled mobile devices to the group "Unauthorized".
  - **Device Authentication** supports Android and iOS mobile devices only.
- 

For instructions, refer to the Mobile Security Management Server *Online Help*.

## Managing Groups

You can add, edit or delete groups under the **Mobile Devices** root group. However, you cannot rename or delete the root group **Mobile Devices** and the group **default**.

### Adding a Group

---

#### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
  3. On the **Managed Devices** tab, click the root group **Mobile Devices**, and then click **Add Group**.
  4. Configure the following:
    - **Parent group:** Select the group under which you want to create a sub-group.
    - **Group name:** Type a name for the group.
    - **Policy:** Select the policy from the drop down list that you want to apply to the group.
  5. Click **Add**.
-

## Renaming a Group

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
  3. On the **Managed Devices** tab, click the group that you want to rename.
  4. Click **Edit**.
  5. Modify the group name, and then click **Rename**.
- 

## Deleting a Group

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
  3. On the **Managed Devices** tab, click the group that you want to delete.
  4. Click **Delete**, and then click **OK** on the confirmation dialog box.
- 

## Managing Mobile Devices

You can edit mobile device information, delete mobile devices, or change the mobile device group on the **Devices** screen.

---

## Reassigning Devices

---

### Procedure

1. On to the Mobile Security administration web console, go to **Devices > Managed Devices**.

The **Devices** screen displays.

2. From the device tree, select the device that you want to reassign.

The device information appears.

3. Click **Change User**, and then modify the user name in the field provided.
  4. Click **Save**.
- 


## Editing Mobile Device Information

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

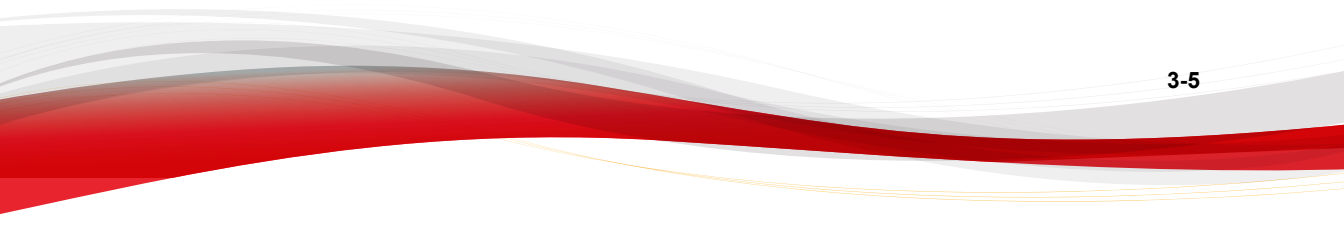3. On the **Managed Devices** tab, click the mobile device from the device tree whose information you want to edit.
  4. Click **Edit**.
  5. Update the information in the following fields:
    - **Phone Number**—the phone number of the mobile device.
    - **Device Name**—the name of the mobile device to identify the device in the device tree.
    - **Group**—the name of the group to which the mobile device belongs from the drop-down list.
- 

- **Asset Number**—type the asset number assigned to the mobile device.
- **Description**—any additional information or notes related to the mobile device or the user.

6. Click **Save**.

---

## Deleting Mobile Devices

Mobile Security provides the following two options for deleting mobile devices:

- *Deleting Single Mobile Device on page 3-6*
- *Deleting Multiple Mobile Devices on page 3-6*

### Deleting Single Mobile Device

---

#### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
  
The **Devices** screen displays.
  3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to delete.
  4. Click **Delete** and then click **OK** on the confirmation dialog box.
- 

The mobile device is deleted from the mobile device tree, and is no longer enrolled with the Mobile Security Management Server.

### Deleting Multiple Mobile Devices

---

#### Procedure

1. Log on to the Mobile Security administration web console.



2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, click the group from the device tree whose mobile devices you want to delete.
4. Select the mobile devices from the list on the right pane, click **Delete** and then click **OK** on the confirmation dialog box.

The mobile devices are deleted from the mobile device tree, and are no longer enrolled with the Mobile Security Management Server.

---

## Moving Mobile Devices to Another Group

You can move mobile devices from one group to another. Mobile Security will automatically send the notification to the user about the policies that you have applied to the group.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, click the group whose mobile devices you want to move to another group.
4. Select the mobile devices from the list on the right pane and then click **Move**.

The **Move Devices** dialog box displays.

5. From the drop-down list, select the target group and then click **OK**.
-

## Mobile Device Status

On the **Managed Devices** tab in the **Devices** screen, select the mobile device to display its status information on the right-pane. Mobile device information is divided into the following sections:

- **Basic**—includes registration status, phone number, LDAP Account, and platform information.
- **Hardware, Operating System**—shows the detailed mobile device information including device and model names, operating system version, memory information, cellular technology, IMEI and MEID numbers, firmware version information, and last iCloud backup.
- **Security**—displays the mobile device's encryption status, mobile device's jail broken status, and the active iTunes account.
- **Network**—displays the Integrated Circuit Card ID (ICCID), bluetooth and WiFi MAC information, detailed network information including carrier network name, settings version, roaming status, Mobile Country Codes (MCC) and Mobile Network Codes (MNC) information, and personal hotspot status.
- **Policy**—shows the times the configuration and the security policy were last updated.
- **Installed Applications**—displays the list of all the applications that are installed on the mobile device, and the compliance check result. This tab is available only for Android and iOS mobile devices.
- **Samsung KNOX Information**—displays additional information about the mobile devices that support Samsung KNOX.

## Basic Mobile Device Agent Search

To search for a Mobile Device Agent based on the mobile device name or phone number, type the information in the **Devices** screen and click **Search**. The search result displays in the device tree.

## Advanced Mobile Device Agent Search

You can use the **Advanced search** screen to specify more Mobile Device Agent search criteria.

---

### Procedure

1. In the **Devices** screen, click the **Advanced search** link. A pop-up window displays.
2. Select the search criteria and type the values in the fields provided (if applicable):
  - **Device Name**—descriptive name that identifies a mobile device
  - **Phone Number**—phone number of a mobile device
  - **Asset Number**—asset number of a mobile device
  - **IMEI**—IMEI number of a mobile device
  - **Serial Number**—serial number of a mobile device
  - **Wi-Fi MAC Address**—Wi-Fi MAC address of a mobile device
  - **Description**—description of a mobile device
  - **Operating System**—confine the search to the specific operating system the mobile device is running; or to the version number for Android and iOS
  - **Group**—group to which the mobile device belongs
  - **Agent Version**—Mobile Device Agents version number on the mobile device
  - **Malware Pattern Version**—Malware Pattern file version number on the mobile device
  - **Malware Scan Engine Version**—Malware Scan Engine version number of the mobile device
  - **App Name**—application installed on mobile devices
  - **Mobile Device Agent Uninstalled by User**—confine the search to mobile devices on which Mobile Device Agent is uninstalled by the user
  - **Rooted Mobile Device**—confine the search to rooted mobile devices

- **Infected mobile device agent**—confine the search to mobile devices with the specified number of detected malware
  - **Device Status**—confine the search to the selected mobile devices' status(es)
3. Click **Search**. The search result displays in the device tree.
- 

## Device Tree View Options

If you select a group in the device tree, you can use the **Column** drop-down list box to select one of the pre-defined views: **General view** and **View all**. This enables you to quickly view information presented in the device tree. The information displayed in the device tree varies according to the selected option.

## Mobile Device Agent Tasks

Trend Micro Mobile Security enables you to perform different tasks on the mobile devices from the **Devices** screen.

### Updating Mobile Device Agents

You can send the update notification to mobile devices with out-of-date components or security policies from the **Managed Devices** tab in **Devices** screen.

---

#### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, click the group whose mobile devices you want to update.
  4. Click **Update**.
-

Mobile Security sends the update notification to all the mobile devices with out-of-date components or security policies.

You can also use the **Update** screen to set Mobile Security to automatically send update notification to mobile devices with out-of-date components or policies or initiate the process manually.

See *Updating Mobile Security Components on page 7-2* for more information.

## Lost Device Protection

If a user loses or misplaces the mobile device, you can remotely locate, lock or delete all of the data on that mobile device.

### Locating a Remote Mobile Device

You can locate the mobile device through the wireless network or by using mobile device's GPS. The Management Server displays the mobile device location on Google Maps.



#### Note

This feature is available for Android and iOS mobile devices only.

---

#### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to locate.
4. Click **Device Locate** and then click **OK** on the confirmation dialog-box.

The Mobile Security Management Server tries to locate the mobile device and displays the Google Maps link on the **Remote Locate Device** screen.

5. Click the Google Maps link on the **Remote Locate Device** screen to see the mobile device's most recent GPS location on the map.
- 

## Locking a Remote Mobile Device

You can send lock instruction from the administration web console to remotely lock a mobile device. Users will require to type the power-on password to unlock the mobile device.



### Note

This feature is supported on Android and iOS mobile devices only.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to lock.
4. Do one of the following:

For an Android mobile device, click **Remote Lock** and then click **OK** on the confirmation dialog-box.

For an iOS mobile device, click **Remote Lock** then type a message that you want to send to the user, the user's phone number, and then click **Lock**.

The **Success** message displays on the screen if the lock command is generated successfully. To check whether the mobile device is locked successfully, you can check the command status in the **Command Queue Management** screen. See [Command Queue Management on page 2-18](#) for details.

---

---

## Wiping a Remote Mobile Device

---

**WARNING!**

Be careful when you use this feature as the action CANNOT be undone. All data will be lost and irrecoverable.

---

You can remotely reset the mobile device to factory settings and clear the mobile device internal memory/SD card. This feature helps ensure the security of the data for lost, stolen or misplaced mobile devices. You can also choose to clear only the following corporate data on the mobile device:

- for Android: Exchange mail, calendar and contacts
  - for iOS: MDM profiles, related policies, configurations and data
- 

**Note**

This feature is supported on Android, iOS, and Windows Phone mobile devices only.

---

For instructions on wiping a mobile device that uses Exchange ActiveSync, see [Wiping a Remote ActiveSync Mobile Device on page 3-20](#).

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
3. On the **Managed Devices** tab, click the mobile device from the device tree that you want to wipe.
4. Click **Remote Wipe**.  
The **Remote Wipe Device** screen displays.
5. Select the appropriate Device Name checkbox.
6. Do one of the following:

- For Android mobile device, select one of the following:
  - **Wipe all data to factory settings.** (All applications and stored data will be removed. The inserted memory card will be formatted. This action cannot be undone.)
  - **Wipe email, calendar and contact list.**—also known as "selective wipe".  
If you select this option, you can also select **Wipe all data to factory settings if selective wipe failed.**
- For iOS mobile device, select one of the following:
  - **Wipe all data to factory settings.** (All applications and stored data will be removed. The inserted memory card will be formatted. This action cannot be undone.)
  - **Wipe out all the provisioned profiles, policies, configurations, and its related data.**
- For Windows Phone mobile device, select the following:
  - **Wipe all data to factory settings.** (All applications and stored data will be removed. The inserted memory card will be formatted. This action cannot be undone.)

7. Click **Remote Wipe Device**.

The selected data is deleted from the mobile device and the Mobile Device Agent is unregistered from the server.

---

## Resetting Password Remotely

If a user has forgotten the power-on password, you can remotely reset the password and unlock the mobile device from the Management Server. After the mobile device is successfully unlocked, the user is able to change the power-on password.



**Note**

This feature is supported on Android, and iOS mobile devices only.

---



---

## Resetting Password for an Android Mobile Device

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
  3. Select the mobile device from the tree, and then click **Password Reset**.
  4. Type and confirm the new six-digit password on the pop-up dialog box that appears.
- 

## Removing the Password for an iOS Mobile Device

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
  3. Select the mobile device from the tree, and then click **Password Reset**.
  4. Click **OK** on the confirmation dialog box that appears. The power on password for the selected iOS mobile device will be removed.
- 

## Managing Samsung KNOX Workspace Remotely

You can send commands to manage Samsung KNOX workspaces from Mobile Security management web console. These commands include creating container, removing container, locking container, unlocking container, and resetting container password. This feature is available for Samsung mobile devices only.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, select a Samsung mobile device from the device tree that you want to manage.
  4. Do one of the following:
    - To create KNOX workspace on the mobile device, click **KNOX Operations > Create Container**.
    - To remove the workspace from the mobile device, click **KNOX Operations > Remove Container**.
    - To enable user to reset workspace password, click **KNOX Operations > Reset Password**.
    - To lock the workspace on the mobile device, click **KNOX Operations > Lock Container**.
    - To unlock the workspace on the mobile device, click **KNOX Operations > Unlock Container**.
- 

## Modifying iOS Settings Remotely

You can change the iOS mobile device settings remotely from the administration web console. These settings include data roaming, voice roaming, personal hotspot.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. On the **Managed Devices** tab, select an iOS mobile device from the device tree that you want to manage.
  4. Do one of the following:
    - To enable data roaming, click **iOS Operations > Enable Data Roaming**.
    - To disable data roaming, click **iOS Operations > Disable Data Roaming**.
    - To enable voice roaming, click **iOS Operations > Enable Voice Roaming**.
    - To disable voice roaming, click **iOS Operations > Disable Voice Roaming**.
    - To enable personal hotspot, click **iOS Operations > Enable Personal Hotspot**.
    - To disable personal hotspot, click **iOS Operations > Disable Personal Hotspot**.
    - To start AirPlay mirroring, click **iOS Operations > Request AirPlay Mirroring**.
    - To stop AirPlay mirroring, click **iOS Operations > Stop AirPlay Mirroring**.
- 

## Exporting Data

You can export data for further analysis or a backup from the **Managed Devices** tab in **Devices** screen.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.
3. Select the mobile device group from the device tree whose data you want to export.
4. Click **Export**.
5. If required, click **Save** on the pop-up that appears to save the .zip file on your computer.

6. Extract the downloaded .zip file content and open the .csv file to view the mobile device information.
- 

## Sending Messages to Mobile Devices

You can send a text message to a user or a group from the **Managed Devices** tab in the **Devices** screen.

---

### Procedure

1. Log on to the Mobile Security administrator web console.
2. Click **Devices** on the menu bar.

The **Devices** screen displays.

3. From the device tree, select the mobile device or the device group to which you want to send a text message.
4. Click **Send Message**.

The **Send a Text Message** screen appears.

5. Type your message in the field provided, and then click **Send**.
- 

## Exchange ActiveSync Devices Tab

After enabling the Exchange Server Integration on the Mobile Security Management Server, the **Exchange ActiveSync Devices** tab on **Devices** screen displays the list of mobile devices that connect to the Exchange Server through ActiveSync service.

On the **Exchange ActiveSync Devices** tab, you can perform the following actions:

- Allow or block access to Exchange Server
- On-demand remote wipe
- Cancel remote wipe command

- Remove mobile devices from the list

## Inviting Exchange ActiveSync Users

Before inviting Exchange ActiveSync users, make sure that you have configured the notifications and reports settings on the Management Server. Refer to the topic *Configuring Notifications & Reports Settings* in the *Installation and Deployment Guide*.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
3. Click the **Exchange ActiveSync Devices** tab.
4. Select a mobile device assigned to the user that you want to invite to Mobile Security.
5. Click **Invite**, and then click **OK** on the confirmation screen that appears.

Mobile Security sends an email message to the invited user. After the mobile device enrolls to the Mobile Security Management Server, the **Managed Device** column displays the status of the mobile device agent.

---

## Allowing or Blocking Access to Exchange Server

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
3. Click the **Exchange ActiveSync Devices** tab.

4. Select a mobile device for which you want to allow or block access to Exchange Server.
5. Click **Allow Access** or **Block Access** and then click **OK** on the confirmation dialog box.

The mobile device status in the **Exchange Access State** column displays the new status after the mobile device syncs with the Exchange Server.

---

## Wiping a Remote ActiveSync Mobile Device

---



### **WARNING!**

Be careful when you use this feature as the action **CANNOT** be undone. All data will be lost and unrecoverable.

---

You can remotely reset the ActiveSync mobile device to factory settings and clear the mobile device internal memory/SD card. This feature helps ensure the security of the data for lost, stolen or misplaced mobile devices.

For instructions on wiping a mobile device that does not use ActiveSync, see [Wiping a Remote Mobile Device on page 3-13](#).

---

### **Procedure**

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
3. Click the **Exchange ActiveSync Devices** tab.
4. Select the mobile device that you want to wipe.
5. Click **Remote Wipe**.

The **Remote Wipe Device** screen pops up.

6. Select the device and then click **Remote Wipe Device**.
- 

## Removing an ActiveSync Mobile Device

The mobile device that you have remotely wiped from the Mobile Security Management Server will no longer be able to access the Exchange Server. You can remove such mobile device information from the **Exchange ActiveSync Devices** tab on the **Devices** screen.



### Note

You can only remove mobile devices that are remotely wiped from the Mobile Security Management Server.

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Devices** on the menu bar.  
The **Devices** screen displays.
  3. Click the **Exchange ActiveSync Devices** tab.
  4. Select the mobile device that you want to remove from the list.
  5. Click **Remove**, and then click **OK** on the confirmation screen.
- 

## Device Enrollment Program Tab

The Device Enrollment Program (DEP) provides a fast, streamlined way to deploy your corporate-owned iOS mobile devices. You can enroll your organization into the DEP program.

Trend Micro Mobile Security integrates with Apple Device Enrollment Program to streamline the enrollment of company-issued iOS 7 and iOS 8 mobile devices purchased

directly from Apple. If you have configured the integration with the Device Enrollment Program, the users who are issued a corporate-owned iOS mobile devices are prompted to enroll with Mobile Security when they configure the mobile device using iOS activation process.

Integrating Mobile Security with DEP means that you do not need to communicate the enrollment instructions to the users, but still ensure that all the mobile devices are enrolled on the their first use. Additionally, this integration also removes the associated support cost.

## Device Enrollment Program User Experience

If you configure Mobile Security integration with the Apple's Device Enrollment Program, the user experience is as follows:

- A user receives a new company-issued iOS mobile device, unpacks it, and switches it on.
- The mobile device connects to Apple.
- From the mobile device ID, the Apple servers detect that the device has been added to your Device Enrollment Program account and send device settings and connection details for your Mobile Security deployment.
- The user then uses the iOS Setup Assistant to complete the initial activation of the mobile device, which includes enrollment with Mobile Security.

You can determine the screens that appear in the iOS Setup Assistant when you configure integration with the Device Enrollment Program. This enables you to further streamline the activation process by skipping screens for settings that you configure through device management. For example, if you plan to require that Location Services is enabled on the devices as part of a geo-fencing configuration, you can configure the iOS Setup Assistant to skip the screen that lets users choose whether to enable Location Services.

As part of the device activation process, the user is prompted to enroll with Mobile Security. The user does not need to enter credentials or an email address, and does not need to know connection details for Mobile Security. A specific Device Enrollment



Program profile that admin creates automatically when you configure integration with the Device Enrollment Program is deployed to the device.

## Setting Up Mobile Security for the Device Enrollment Program

Before you can configure Mobile Security for the Device Enrollment Program (DEP), make sure that you have already enrolled your organization to the DEP program on the following Apple website:

<http://deploy.apple.com/>

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Devices** on the menu bar.  
The **Devices** screen appears.
3. Click the **Device Enrollment Program** tab.
4. Click **Settings**.
5. Click the **Download** link before **Public Key** to download the public key to the local computer from Mobile Security Management Server.
6. Click the **Apple Deployment Programs** link before **Deployment**.  
The **Apple Deployment Programs** web portal opens in the Internet web browser.
7. Sign in to your **Device Enrollment Program** account and create a new MDM server using the public key you downloaded from the Mobile Security Management Server. Refer to the following document for the detailed steps to enroll to the Device Enrollment Program.  
[https://www.apple.com/iphone/business/docs/DEP\\_Business\\_Guide\\_EN\\_Feb14.pdf](https://www.apple.com/iphone/business/docs/DEP_Business_Guide_EN_Feb14.pdf)
8. On the MDM server, generate an access token and save the token file to a suitable location, and then assign mobile devices for enrollment to the MDM server.

9. Upload the token file you generated through the **Apple Deployment Programs** web portal to the Mobile Security Management Server. Wait until the upload completes.

After the upload completes, the **Device Enrollment Program Settings** screen appears.

10. Under the **Device Enrollment Program Detail** section, configure the following setup profile settings for mobile devices.
  - **Profile name:** a name for the setup profile displayed on the mobile device.
  - **Require supervision:** to place the mobile devices enrolled through the Device Enrollment Program to the supervised mode.
  - **Removable configuration:** to allow users to remove the device management configuration from devices enrolled through the Device Enrollment Program.
  - **Allow pairing:** to enable devices enrolled through the Device Enrollment Program to be managed through Apple tools such as iTunes and Apple Configurator.
  - **Mandatory configuration:** to prevent users from skipping the Mobile Security enrollment step in the device activation process.
  - **Business unit:** the name of the department to which the mobile device is assigned to.
  - **Unique service ID:** if you have multiple Mobile Security deployments, enter in the Unique service ID box a name that uniquely identifies the deployment you are configuring.
  - **Support phone number:** the phone number for users to call for assistance.
  - **Required setup items:** the setup items that are required for the users to configure. By default, all the setup items are required. If you disable any of these items, the users will be able to skip that item during setup.

11. Click **Save**.

Mobile Security Management Server synchronizes the mobile device list with the Apple Device Enrollment Programs server and displays the mobile devices on the **Devices Enrollment Program** tab on **Devices** screen.

---

## Integration with Trend Micro Control Manager

Trend Micro Mobile Security provides integration with Trend Micro Control Manager (also referred to as Control Manager or TMCM). This integration enables the Control Manager administrator to:

- create, edit or delete security policies for Mobile Security
- deliver security policies to enrolled mobile devices
- view Mobile Security **Dashboard** screen

For the detailed information about Trend Micro Control Manager and handling Mobile Security policies on Control Manager, refer to the product documentation at the following URL:

<http://docs.trendmicro.com/en-us/enterprise/control-manager.aspx>

## Creating Security Policies in Control Manager

The Trend Micro Control Manager web console displays the same security policies that are available in Mobile Security. If a Control Manager administrator creates a security policy for Mobile Security, Mobile Security will create a new group for this policy and move all the target mobile devices to this group. To differentiate the policies that are created in Mobile Security with the policies created in Control Manager, Mobile Security adds a prefix **TMCM\_** to the group name.

## Deleting or Modifying Security Policies

The Control Manager administrator can modify a policy at any time and the policy will be deployed to the mobile devices immediately.

Trend Micro Control Manager synchronizes the policies with Trend Micro Mobile Security after every 24 hours. If you delete or modify a policy that is created and deployed from Control Manager, the policy will be reverted to the original settings or created again after the synchronization occurs.

## Security Policy Statuses on Control Manager

On the Trend Micro Control Manager web console, the following statuses are displayed for the security policies:

- **Pending:** The policy is created on the Control Manager web console and has not yet been delivered to the mobile devices.
- **Deployed:** The policy has been delivered and deployed on all the target mobile devices.

# Chapter 4

## Managing Users and Invitations

This chapter shows you how to manage the users and invitations lists.

The chapter includes the following sections:

- *Users Tab on page 4-2*
- *Invitations Tab on page 4-7*

## Users Tab

The **Users** tab enables you to perform the following tasks:

- invite a user to register
- invite a user again and change the assigned group
- edit user information
- delete a user
- search for a user

## Viewing the Users List

---

### Procedure

1. On the Mobile Security administration web console, go to **Users**.

The **Users** screen appears.

2. To sort the list, click the header for any of the following columns.

- User Name
- Email
- Devices
- Invited On

3. To search for a user, type the user name or email address in the **Search** bar and then press Enter.

If the user is in the list, Mobile Security displays the information.

---

## Inviting a User to Register

---

### Procedure

1. On the Mobile Security administration web console, go to **Users**.

The **Users** screen displays.

2. On the **Users** tab, click **Invite Users** and then select one of the following options.

| METHOD                             | DESCRIPTION   |
|------------------------------------|---|
| Invite users manually              | <p>This method allows you to add user information one at a time by filling out the form.</p> <p>For more information, see <a href="#">Inviting a User Manually on page 4-3</a>.</p> |
| Invite users from CSV file         | <p>This method allows you to copy and paste the user information from a CSV file.</p> <p>For more information, see <a href="#">Inviting a User from a CSV File on page 4-4</a>.</p> |
| Invite users from Active Directory | <p>This method allows you to select users from the Active Directory.</p> <p>For more information, see <a href="#">Inviting a User from the Active Directory on page 4-5</a>.</p>    |

---

## Inviting a User Manually

You can use this option to invite users by using the form to add user information one at a time.

---

### Procedure

1. On the Mobile Security administration web console, go to **Users > Invite Users > Manually**.


The **Invite Users Manually** screen appears.

2. On the **Invite Users Manually** window, complete the following fields.
  - **Phone Number**—type the phone number associated with the user.
  - **Email**—type the user email address to send notification mail.
  - **User Name**—type the name of the user to identify the device in the device tree.
  - **Group**—select the group from the drop-down list.

**Tip**

You can re-assign the user to a different group at a later time from the **Devices** screen.

---

3. To invite more users, click the  button and repeat step 2.
4. Click **Save**.

A confirmation message appears.

---

## Inviting a User from a CSV File

This option allows you to copy user information from a CSV file that uses the required data format. Mobile Security automatically detects and converts the data to complete the user information form.

---

### Procedure

1. On the Mobile Security administration web console, go to **Users > Invite Users > From CSV**.

The **Invite Users from CSV** screen appears.

2. Type the user information using the following format in the text box.

Phone\_number1, email1, user\_name1, group\_name1



**Note**

Use a semicolon (;) or a line break to separate each user information.

---

3. Click **Validate** to verify that the information follows the specified format.

A pop-up message displays the validation result.

---

**Note**

If the format is incorrect, fix the errors and try again.

---

4. Click **Save**.

A confirmation message appears.

---

## Inviting a User from the Active Directory

This option allows you to select users from the Active Directory.

---

### Procedure

1. On the Mobile Security administration web console, go to **Users > Invite Users > From Active Directory**.

The **Invite Users from Active Directory** screen appears.

2. Type the user information in the search field provided, and click **Search**.
3. Select the users from the search result, and then click **Invite**.
4. Click **Save**.

A confirmation message appears.

---

## Inviting a User Again

---

### Procedure

1. On the Mobile Security administration web console, go to **Users**.

The **Users** screen displays.

2. Select the user and then click **Invite Again**

The **Invite Again** screen appears.

3. Select the group from the drop-down list.

4. Click **Save**.

A confirmation message appears.

---

## Editing User Information

---

### Procedure

1. On the Mobile Security administration web console, go to **Users**.

The **Users** screen displays.

2. Click the user name from the list.

The **Edit User Information** screen appears.

3. Modify the user name and email address as required.

4. Click **Save**.

Mobile Security updates the user information.

---

---

## Deleting a User

**Note**

You can only delete users without devices registered to the Mobile Security server.

---

---

### Procedure

1. On the Mobile Security administration web console, go to **Users**.

The **Users** screen displays.

2. Select the user from the list and then click **Delete**.
3. On the confirmation message that appears, click **OK**.

Mobile Security deletes the selected user.

---

## Invitations Tab

The **Invitations** tab on the **Users** screen enables you to perform the following tasks:

- view the invitations list
- resend an invitation
- cancel an active invitation
- remove an invitation from the list
- search for an invitation

## Viewing the Invitations List


---

### Procedure

1. On the Mobile Security administration web console, go to **Users > Invitations**.

The **Invitations** tab appears.

- To filter the list, select the invitation status from the drop-down list.

| INVITATION STATUS | DESCRIPTION   |
|-------------------|---|
| Active            | The invitation is valid and the user can use the information in the invitation message to enroll.   |
| Expired           | The invitation has expired and the user can no longer use the information in the invitation message to enroll.  |
| Used              | <p>The user has already used the information in the invitation message to enroll and the Enrollment Key has become invalid.</p> <hr/> <p> <b>Note</b><br/>This status will only appear when the <b>Enrollment Key usage limitation option</b> is set to <b>Use for one time</b> in Device Enrollment Settings.</p> <hr/> |
| Canceled          | The invitation is canceled from the server and the user cannot use the information in the invitation message to enroll.   |

- To search for an invitation, type the user name, phone number, or email address in the **Search** bar and then press Enter.

If the invitation is in the list, Mobile Security displays the information.

## Resending Invitations

### Procedure

- On the Mobile Security administration web console, go to **Users > Invitations**
- Select invitations from the list.
- Click **Resend Invitation**.

Mobile Security resends the invitation to the selected users.

---

## Canceling Active Invitations

---

### Procedure

1. On the Mobile Security administration web console, go to **Users > Invitations**
2. Select invitations from the list.
3. Click **Cancel Invitation**.

The selected invitations are canceled.

---

## Removing Invitations from the List

---



### Note

You can only remove invitations with either **Used** or **Canceled** status.

---

### Procedure

1. On the Mobile Security administration web console, go to **Users > Invitations**
2. Select invitations from the list.
3. Click **Remove Invitation**.

The selected invitations are removed from the list.

---



# Chapter 5

## Protecting Devices with Policies

This chapter shows you how to configure and apply security policies to mobile devices in a Mobile Security group. You can use policies related to provisioning, device security and data protection.

The chapter includes the following sections:

- *About Security Policies on page 5-2*
- *Managing Policies on page 5-3*
- *Security Policies in Mobile Security on page 5-7*

## About Security Policies

You can configure security policies for a Mobile Security group on the Management Server. These policies apply to all mobile devices in the group. You can apply security policies to all Mobile Security groups by selecting the **Mobile Devices** group (the root group). The following table lists the security policies available in Mobile Security.

**TABLE 5-1. Security Policies in Mobile Security**

| POLICY GROUP | POLICY                     | REFERENCE   |
|--------------|----------------------------|---|
| General      | Common Policy              | See <a href="#">Common Policy on page 5-7.</a>              |
| Provisioning | Wi-Fi Policy               | See <a href="#">Wi-Fi Policy on page 5-8.</a>               |
|              | Exchange ActiveSync Policy | See <a href="#">Exchange ActiveSync Policy on page 5-8.</a> |
|              | Certificate Policy         | See <a href="#">Certificate Policy on page 5-9.</a>         |
|              | VPN Policy                 | See <a href="#">VPN Policy on page 5-9.</a>                 |
|              | Global HTTP Proxy Policy   | See <a href="#">Global HTTP Proxy Policy on page 5-9.</a>   |
|              | Single Sign-On Policy      | See <a href="#">Single Sign-On Policy on page 5-9.</a>      |
|              | Cellular Network Policy    | See <a href="#">Cellular Network Policy on page 5-11.</a>   |
|              | AirPlay/AirPrint Policy    | See <a href="#">AirPlay/AirPrint Policy on page 5-10.</a>   |
|              | Theme Policy               | See <a href="#">Theme Policy on page 5-11.</a>              |
|              | Managed Domains Policy     | See <a href="#">Managed Domains Policy on page 5-11.</a>    |



| POLICY GROUP           | POLICY                               | REFERENCE   |
|------------------------|--------------------------------------|---|
| Device Security        | Security Protection Policy           | <a href="#">Security Protection Policy on page 5-12</a>                   |
|                        | Spam Prevention Policy               | See <a href="#">Spam Prevention Policy on page 5-15</a> .                 |
|                        | Call Filtering Policy                | See <a href="#">Call Filtering Policy on page 5-18</a> .                  |
|                        | Web Threat Protection Policy         | See <a href="#">Web Threat Protection Policy on page 5-20</a> .           |
| Devices                | Password Policy                      | See <a href="#">Password Policy on page 5-20</a> .                        |
|                        | Feature Lock Policy                  | See <a href="#">Feature Lock Policy on page 5-20</a> .                    |
|                        | Compliance Policy                    | See <a href="#">Compliance Policy on page 5-21</a> .                      |
| Application Management | Application Monitor & Control Policy | See <a href="#">Application Monitor and Control Policy on page 5-21</a> . |
|                        | Volume Purchasing Program Policy     | See <a href="#">Volume Purchasing Program Policy on page 5-23</a> .       |
| Samsung KNOX           | Container Policy                     | See <a href="#">Container Policy on page 5-24</a> .                       |

## Managing Policies

Mobile Security enables you to quickly create a policy using the default security policy templates.

Use the **Policy** screen to create, edit, copy or delete security policies for mobile devices.

## Creating a Policy

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. Click **Create**.

The **Create Policy** screen displays.

4. Type the policy name and description in their respective fields and then click **Save**.

Mobile Security creates a policy with the default settings. However, the policy is not assigned to a group. To assign the policy to a group, see [Assigning or Removing Policy from a Group on page 5-5](#).

5. (Super Administrator only) If you want to use this policy as a template, click the arrow button under the **Type** column on the **Policy** screen. The group administrators can use templates created by the Super Administrator to create policies for their assigned groups.



### Note

- You cannot assign a template to any group.
  - You can also convert a template to policy. However, you can only convert a template to policy if the template is not assigned to any group.
- 

## Editing a Policy

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. In the policy list, click the policy name whose details you want to edit.

The **Edit Policy** screen displays.

4. Modify the policy details and then click **Save**.
- 

## Assigning or Removing Policy from a Group

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. In the **Applied Groups** column of a policy, click the group name. If the policy is not assigned to a group, click **None**.
  4. Do one of the following:
    - To assign a policy to a group: from the **Available groups** list on the left side, select the group to which you want to apply the policy, and then click **>** to move the group to the right side.
    - To remove policy from a group: from the group list on the right side, select a group that you want to remove, and then click **<** to move the group to the **Available groups** list on the left side.
  5. Click **Save**.
- 

## Copying a Policy

---

### Procedure

1. Log on to the Mobile Security administration web console.

2. Click **Policies** on the menu bar.

The **Policy** screen displays.

3. Select the policy that you want to copy, and then click **Copy**.
- 

## Deleting Policies

You cannot delete the **Default** policy and any policy that is applied to a group. Make sure to remove the policy from all the groups before deleting a policy. See [Assigning or Removing Policy from a Group on page 5-5](#) for the procedure.

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Policies** on the menu bar.  
The **Policy** screen displays.
  3. Select the policy that you want to delete, and then click **Delete**.
- 

## Configuring Application Availability

Mobile Security enables you to configure apps that you want to make available on iOS and Android mobile devices for a particular policy.

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Policies** on the menu bar.  
The **Policy** screen displays.
3. Click the number of apps for the policy, under the **Available Apps** column.  
The **Available Apps** screen displays.

4. Click **iOS Applications** or **Android Applications** tab.
  5. Do one of the following:
    - To enable or disable an app, click on the button under the **Permission** column for the app to toggle.
    - To enable or disable all apps, click **Enable All** or **Disable All**.
  6. Toggle the availability of a application in the **Permission** column.
- 

## Security Policies in Mobile Security

This section introduces the security policies that are available in Mobile Security.

Using the superuser account, you can specify any policy as a template for group admins to create further security policies in Mobile Security. However, once you specify a security policy as a template, you cannot assign that security policy to any group.

### Common Policy

Common Policy provides the common security policies for mobile devices. To configure common security policy settings, click **Policies**, then click the policy name, and then click **Common Policy**.

- **User Privileges:** You can enable or disable the feature that allows users to uninstall the Mobile Device Agent. Additionally, you can select whether to allow users to configure Mobile Security device agent settings.

The following is a list of features associated with uninstall protection:


- turn On/Off uninstall protection from the administration console
- password length must have a minimum of six (6) and a maximum of twelve (12) characters; password may contain numbers, characters or symbols.
- password can be set for each group from the administration console.


If you do not select the **Allow users to configure Mobile Security client settings** check box, users cannot change Mobile Device Agent settings. However, the


filtering lists for **Spam Prevention Policy**, **Call Filtering Policy** and **Web Threat Protection Policy** are not affected when this option is selected. For more information, see *Spam SMS Prevention Policies on page 5-15*, *Spam WAP Push Prevention Policies on page 5-17* and *Web Threat Protection Policy on page 5-20*.

- **Update Settings:** You can select to have the Mobile Security Management Server notify Mobile Device Agents when a new component is available for update. Or you can select the auto-check option to have Mobile Device Agents periodically check for any component or configuration updates on the Mobile Security Management Server.

**Update Settings**

Notify Mobile Device Agent through SMS messages when a new component version is available. 

Enable auto-check in server for components, path, configurations, and policies changes 

Check in every:  day(s) 

**FIGURE 5-1. Common Policy, Update Settings section**

- **Log Settings:** When Mobile Device Agents detect a security risk, such as a malware on Android operating system, a log is generated on the mobile device.

## Wi-Fi Policy

Wi-Fi Policy enables you to deliver your organization's Wi-Fi network information to Android and iOS mobile devices; including the network name, security type and password.

To configure Wi-Fi policy settings, click **Policies**, then click the policy name, and then click **Wi-Fi Policy**.

## Exchange ActiveSync Policy

Exchange ActiveSync Policy enables you to create an Exchange ActiveSync policy for your organization and deliver it to iOS mobile devices.

To configure Exchange ActiveSync policy settings, click **Policies**, then click the policy name, and then click **Exchange ActiveSync Policy**.

## VPN Policy

VPN policy settings enable you to create a VPN Policy for your organization and deliver it to iOS mobile devices.

To configure VPN policy settings, click **Policies**, then click the policy name, and then click **VPN Policy**.

## Global HTTP Proxy Policy

Global HTTP Proxy Policy enables you to deliver your organization's proxy information to mobile devices. This policy only applies to iOS mobile devices that are in supervised mode.

To configure global HTTP proxy policy settings, click **Policies**, then click the policy name, and then click **Global HTTP Proxy Policy**.

## Certificate Policy

Certificate Policy enables you to import certificates that you need to deploy on iOS mobile devices.

To configure certificate policy settings, click **Policies**, then click the policy name, and then click **Certificate Policy**.

## Single Sign-On Policy

Single sign-on (SSO) policy enables the users to use the same credentials across applications, including Mobile Security and applications from the App Store. Each new application configured with SSO certification verifies user permissions for enterprise resources, and logs users in without requiring them to reenter their passwords.

The single sign-on policy includes the following information:

- **Name:** the Kerberos principal name.
- **Realm:** The Kerberos realm name.

The Kerberos realm name should be properly capitalized.

- **URL Prefixes** (Optional): List of URLs that must be matched in order to use an account for Kerberos authentication over HTTP. If this field is blank, the account is eligible to match all http and https URLs. The URL matching patterns must begin with either http or https.

Each entry of this list must contain a URL prefix. Only the URLs that begin with one of the strings in an account are allowed to access the Kerberos ticket. URL matching patterns must include the scheme. For example, http://www.example.com/. If a matching pattern does not end in /, it will automatically add a / to the URL.

- **Application Identifiers** (Optional): List of application identifiers that are allowed to use the account. If this field is blank, this account matches all application identifiers.

The **Application Identifiers** array must contain strings that match application bundle IDs. These strings may be exact matches (such as com.mycompany.myapp) or may specify a prefix match on the bundle ID by using the \* wildcard character. The wildcard character must appear after a period character (.), and may appear only at the end of the string (such as com.mycompany.\*). When a wildcard is used, any application whose bundle ID begins with the prefix is granted access to the account.

To configure Single Sign-On Policy for iOS settings, click **Policies**, then click the policy name, and then click **Single Sign-On Policy**.

## AirPlay/AirPrint Policy

AirPlay/AirPrint policy settings enable you to create AirPlay and AirPrint policies for your organization and deliver it to iOS mobile devices.

To configure AirPlay and/or AirPrint policy settings, click **Policies**, then click the policy name, and then click **AirPlay/AirPrint Policy**.



## Cellular Network Policy

Cellular network policy settings enables you to configure cellular network settings for your organization and deliver it to iOS mobile devices.

To configure the cellular network policy settings, click **Policies**, then click the policy name, and then click **Cellular Network Policy**.

## Theme Policy

Theme policy settings enable you to push a font and set a wallpaper for home screen and lock screen for the iOS mobile devices. This policy applies to iOS mobile devices that are in the supervised mode only.

To configure theme policy settings, click **Policies**, then click the policy name, and then click **Theme Policy**.

## Managed Domains Policy

Managed domains policy enables you to configure the email and/or web domains that your organization manages.

- **Unmarked Email Domains:** When a user is composing an email using the system email client, any email address entered which does not match the configured domains will be highlighted (marked) in red. Administrators should consider using this functionality, to warn users who may be inadvertently attempting to send sensitive information to untrusted email addresses.
- **Managed Safari Web Domains:** You can specify that files downloaded from specific domains using Safari may only be opened with managed apps. For example, a PDF downloaded from internal.example.com may be opened with Adobe Reader (a managed app) but not Dropbox (an unmanaged app). This provides improved containerization of Safari and wider the use as an enterprise browser.



**Important**

You must disable the following iOS features in the Feature Lock Policy. Otherwise, the managed Safari Web domains settings will not have any effect, since the downloaded files can be opened with other (unmanaged) apps:

- Open documents from managed apps in other apps (7.0 or above)
  - Open documents from other apps in managed apps (7.0 or above)
- 

To configure managed domain policy settings, click **Policies**, then click the policy name, and then click **Managed Domain Policy**.


## Security Protection Policy





You can configure the **Malware Protection** and **Security Protection** settings from the **Security Protection Policy** screen.



To configure malware protection policy settings, click **Policies**, click the policy name, and then click **Security Protection Policy**.

The following table describes the available settings for this policy.

**TABLE 5-2. Security Protection Policy Settings**

| SECTION            | ITEM   | DESCRIPTION  | SUPPORTED MOBILE DEVICE OS   |
|--------------------|--|--|--|
| Malware Protection | <b>Scan installed applications only</b>      | Select this option if you want to scan installed applications only   |  |
|                    | <b>Scan installed applications and files</b> | Select this option if you want to scan installed applications and other files stored on the mobile device.<br><br>If you select this option, specify whether you want to scan only APK files or all files. |  |
|                    | <b>Scan when installing apps</b>             | Enable this option if you want to run the malware scan every time users install an app.  |  |
|                    | <b>Scan after pattern update</b>             | Enable this option if you want to run the malware scan after every pattern update.   |  |

| SECTION             | ITEM   | DESCRIPTION   | SUPPORTED MOBILE DEVICE OS  |
|---------------------|--|---|---|
| Security Protection | <b>Enable Facebook scan</b>  | <p>Enable this option to scan the Facebook privacy settings.</p> <hr/> <p> <b>Note</b><br/>Enabling <b>Facebook scan</b> allows users to protect their information and make sure that they only share data with people they trust.</p> |    |
|                     | <b>Enable On-Demand Scan and display the Scan button on mobile devices</b> | <p>Enable this option if you want to allow on-demand scans and display the <b>Scan</b> button on the user's mobile device.</p>  |    |
|                     | <b>Upload security scan logs to the server automatically</b>               | <p>Enable this option to automatically upload the security logs to the Mobile Security Management Server.</p>   |  |

| SECTION       | ITEM           | DESCRIPTION  | SUPPORTED MOBILE DEVICE OS   |
|---------------|----------------|--|--|
| Scan Schedule | <b>Daily</b>   | The scan runs every day on the specified day at the <b>Start time</b> .    |   |
|               | <b>Weekly</b>  | The scan runs once a week on the specified day at the <b>Start time</b> .  |  |
|               | <b>Monthly</b> | The scan runs once a month on the specified day at the <b>Start time</b> . |  |

## Spam Prevention Policy

The spam prevention policy in Mobile Security provides protection against spam WAP push and SMS text messages.

To configure spam prevention policy settings, click **Policies**, then click the policy name, and then click **Spam Prevention Policy**.

## Spam SMS Prevention Policies

This feature provides you server-side control of SMS spam prevention policies. The following features are available when configuring the SMS Spam Prevention Policies:

- enable or disable spam SMS prevention for mobile device
- configure the mobile device to use a blocked list, approved list or disable the SMS anti-spam feature for mobile device.
- configure an approved list from the administration console
- configure a blocked list from the administration console

Refer to the following table for approved or blocked filtering list configuration details.

**TABLE 5-3. Filtering list configuration for Spam SMS Prevention Policy**

| CENTRAL CONTROL | USER CONTROL | DESCRIPTION   |
|-----------------|--------------|---|
| Disabled        | Enabled      | <p>The user can edit the approved/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the messages based on the following priority:</p> <ol style="list-style-type: none"> <li>1. Approved List on Mobile Device Agent</li> <li>2. Blocked List on Mobile Device Agent</li> </ol>  |
| Enabled         | Disabled     | <p>The user is only allowed to edit the approve/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the messages based on the following priority:</p> <ol style="list-style-type: none"> <li>1. Approved List or Blocked List on server</li> <li>2. Approved List on Mobile Device Agent</li> <li>3. Blocked List on Mobile Device Agent</li> </ol>  |
| Enabled         | Enabled      | <p>The user can view or edit the approved/blocked list defined by the administrator and can also use the approved/blocked list on the mobile device agent.</p> <p>When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies.</p> <p>Mobile Security allows or blocks the messages based on the following priority:</p> <ol style="list-style-type: none"> <li>1. Approved List on Mobile Device Agent</li> <li>2. Blocked List on Mobile Device Agent</li> <li>3. Approved List or Blocked List on server</li> </ol> |

**Note**

The SMS approved and blocked list must use the format: "[name1:]number1; [name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (, ) and spaces. The maximum number of entries should not exceed 200.

---

## Spam WAP Push Prevention Policies

This feature provides you server-side control of WAP Push Prevention. If enabled, you can select whether to use a WAP approved list.

**Note**

The WAP approved list must use the format: "[name1:]number1;[name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (, ) and spaces. The maximum number of entries should not exceed 200.

---

The following is a list of features available when configuring WAP Push Prevention policies:

- enable or disable WAP Push Prevention for mobile device
- configure the mobile device to use an approved list or disable WAP Push Prevention on the mobile device
- configure an approved list from the administration console
- if the administrator has enabled server-side control, the user will be unable to change the WAP Push Prevention type defined by the administrator
- if the administrator has disabled server-side control, and allowed users to configure Mobile Security settings on mobile device, the user will be unable to view or edit the WAP Push Prevention list configured by the administrator, and may edit the personal WAP Push Prevention list on the mobile device side

**Note**

The users' personal settings for spam messages will be cleared after the Spam Prevention Policy is applied on the Mobile Device Agents.

## Call Filtering Policy

This feature provides you server-side control of call filtering policies. To configure call filtering policy settings, click **Policies**, then click the policy name, and then click **Filtering Policy**.

The following features are available when configuring the Call Filtering Policies:

- enable or disable call filtering for mobile device
- configure the mobile device to use a blocked list or an approved list
- configure an approved list from the administration console
- configure a blocked list from the administration console

Refer to the following table for approved or blocked filtering list configuration details.

**TABLE 5-4. Filtering list configuration for Call Filtering Policy**

| CENTRAL CONTROL | USER CONTROL | DESCRIPTION  |
|-----------------|--------------|--|
| Disabled        | Enabled      | <p>The user can edit the approved/blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the URLs based on the following priority:</p> <ol style="list-style-type: none"> <li>1. Approved List on Mobile Device Agent</li> <li>2. Blocked List on Mobile Device Agent</li> </ol> |



| CENTRAL CONTROL | USER CONTROL | DESCRIPTION  |
|-----------------|--------------|--|
| Enabled         | Disabled     | <p>The user is only allowed to edit the approved/ blocked list on the mobile device agent.</p> <p>Mobile Security allows or blocks the incoming calls based on the following priority:</p> <ol style="list-style-type: none"> <li>1. Blocked List on server</li> <li>2. Approved List on Mobile Device Agent</li> <li>3. Blocked List on Mobile Device Agent</li> </ol> <p>You can also configure server-side control for outgoing calls on Android mobile devices.</p>  |
| Enabled         | Enabled      | <p>The user can view or edit the approved/ blocked list defined by the administrator and can also use the approved/ blocked list on the mobile device agent.</p> <p>When the security policies sync with the mobile device agent, it does not sync the filtering lists, and updates all other settings according to the policies.</p> <p>Mobile Security allows or blocks the incoming calls based on the following priority:</p> <ol style="list-style-type: none"> <li>1. Approved List on Mobile Device Agent</li> <li>2. Blocked List on Mobile Device Agent</li> <li>3. Blocked List on server</li> </ol> <p>You can also configure server-side control for outgoing calls on Android mobile devices.</p> |

**Note**

The call filtering approved and blocked list must use the format: "[name1:]number1; [name2:]number2;...".

The 'name' length should not exceed 30 characters, while phone number should be between 4 and 20 characters long and can contain the following: 0-9, +, -, #, (, ) and spaces. The maximum number of entries should not exceed 200.

## Web Threat Protection Policy

Enables you to manage Web threat protection policy from the Mobile Security Management Server and deploys it on Android and iOS mobile devices. It also enables Android mobile devices to send the Web threat protection log back to the server.

To configure Web Threat Protection Policy settings, click **Policies**, then click the policy name, and then click **Web Threat Protection Policy**.

## Password Policy

The password policy prevents unauthorized access to data on mobile devices.

To configure password policy settings, click **Policies**, then click the policy name, and then click **Password Policy** from the left-menu.

## Feature Lock Policy

With this feature, you can restrict (disable) or allow (enable) the use of certain mobile device features/components. For example, you can disable the camera for all mobile devices in a particular group.

To configure Feature Lock Policy settings, click **Policies**, then click the policy name, and then click **Feature Lock Policy** from the left-menu.

See [Supported Mobile Device OS Features on page 1-12](#) for the list of supported features/components.



### **WARNING!**

Use caution while disabling WLAN/WIFI and/or Microsoft ActiveSync. The mobile device may not be able to communicate with the server if both these options are unavailable.

---

For Android mobile devices, you can also add access point(s) to control the availability of the device components within the range of those access point(s).

## Compliance Policy

Compliance policy enables you to set the compliance criteria for the mobile devices. If any mobile device does not match the criteria, Mobile Security displays its non-compliant status on the server UI. Mobile Security also sends an email to the non-compliant iOS mobile device, while it displays a notification on non-compliant Android mobile devices. The compliance check list includes:

- **Rooted/Jailbroken**—checks whether the mobile device is rooted/jailbroken or not.
- **Unencrypted**—checks whether the encryption is enabled on the mobile device or not
- **OS version check**—checks whether the OS version matches the defined criteria or not.

To configure compliance policy settings, click **Policies**, then click the policy name, and then click **Compliance Policy**.

## Application Monitor and Control Policy

Application monitor and control policies provide you server-side control of the applications installed on mobile devices and push the required applications to the mobile devices.

To configure application monitor and control policy settings, click **Policies**, then click the policy name, and then click **Application Monitor and Control Policy**.

- **Required Applications**—using this option will push all the applications that you add in the list, to the mobile devices. You can also link a VPN to applications, so that the applications always use this VPN to connect to the network.
- **Permitted Applications**—control the applications installed on mobile devices by using approved and blocked lists.

For iOS mobile devices, Mobile Security sends notification to administrator and the user for any application that does not comply with the policy.

For Android mobile devices, Mobile Security blocks the application that does not comply with the policy and will allow all others.

- **Enable system apps blocking** (Android only):

if selected, Mobile Security will block all the system apps on Android mobile devices.

- **Enable Application Category:** select the application category that you want to enable or disable on mobile devices. You can also make the exception by adding the applications that belong to these categories to the approved or blocked list. For example, if you have disabled a category type Games, Mobile Security will block all the applications that belong to this category, unless any such application exists in the approved list.

Mobile Security allows or blocks the applications according to the following priority:

1. **Approved List**—Mobile Security allows applications that are in the approved list even if they belong to the category that you have disabled.
  2. **Blocked List**—Mobile Security blocks applications that are in the blocked list even if they belong to the category that you have enabled.
  3. **Application permissions**—Mobile Security allows or blocks applications according to your selected permission status for the category that they belong to.
- **Enable Application Permissions** (for Android only): select the application services that you want to enable or disable on Android mobile devices. You can also make the exception by adding the applications that use these services to the approved or blocked list. For example, if you have disabled service type **Read Data**, Mobile Security will block all the applications that use the Read Data service, unless any such application exists in the approved list.

Mobile Security allows or blocks the applications according to the following priority:

1. **Approved List**—Mobile Security allows applications that are in the approved list even if they use the services that you have disabled.
2. **Blocked List**—Mobile Security blocks applications that are in the blocked list even if they use the services that you have enabled.

3. **Application permissions**—Mobile Security allows or blocks applications according to your selected permission status for the services that they use.
  - **Only allow the following applications:** add the applications to the approved list that you want to allow users to use on their mobile devices. If enabled:
    - Mobile Security displays a pop-up warning message on Android mobile devices if it detects applications that are not in the approved list.
    - On iOS mobile devices, if Mobile Security detects any application that is not in the approved list, Mobile Security sends an email notification to the user.
  - **Only block the following applications:** add the applications to the blocked list that you do not want users to use on their mobile devices. If enabled:
    - Mobile Security displays a pop-up warning message on Android mobile devices if it detects applications that are in the blocked list.
    - On iOS mobile devices, if Mobile Security detects any application that is in the blocked list, Mobile Security sends an email notification to the user.
  - **Lock to App (for Supervised Mode Only)**—restrict the iOS mobile device to the specified application.

Mobile Security checks for restricted applications and sends email alert to the users:

- automatically according to the **Information Collection Frequency** settings in **Administration > Communication Server Settings > Common Settings (tab)**, or
- when you update the **Information Collection Frequency** settings in **Administration > Communication Server Settings > Common Settings (tab)**.

## Volume Purchasing Program Policy

This policy enables the administrator to import the iOS applications to the Mobile Security administration web console that are purchased through the Apple's Volume Purchase Program. Mobile Security will push all the applications in the Volume Purchasing Program List to mobile devices in a group.

To configure Volume Purchasing Program policy:

1. Add applications to the Enterprise App Store. See [Adding an Application on page 6-2](#) for the procedure.
2. Click **Policies**, then click the policy name, and then click **Volume Purchasing Program Policy**.
3. Click **Import** and then select applications to import from the Enterprise App Store.
4. Click **Save** to push all the applications to the iOS mobile devices.

## Container Policy

This policy enables you to manage Samsung KNOX container security settings. You can configure approved list or blocked list for accounts, apply restrictions, and configure browser, password, and application settings.



### Note

You must configure KNOX license in Mobile Security before enabling this policy. To configure the KNOX license, navigate to **Administration > Product License** on the administration web console.

---

- **Account Settings:** Specify accounts that can be added or restricted on Samsung KNOX containers by using approved and/or blocked lists.
- **Restriction Settings:** Disable camera or file sharing on Samsung KNOX containers.
- **Browser Settings:** Configure security settings for the native Android web browser on Samsung KNOX containers.
- **Password Settings:** Configure password security settings for Samsung KNOX container.
- **Application Settings:** Configure the following lists:
  - **Filter Applications List:** Configure approved list or blocked list to restrict applications installation on Samsung KNOX container.

- **Required Applications:** Configure the required applications list to specify applications that must be installed on Samsung KNOX.
- **Disable Applications:** Configure the disable applications list to disable certain applications on the mobile device. If the applications on this list are installed on the mobile device, they will not be removed, but the user will not be able to use these applications.

To configure container policy settings, click **Policies**, then click the policy name, and then click **Container Policy**.





# Chapter 6

## Managing Apps

This chapter shows you how to manage apps for iOS and Android mobile devices.

The chapter includes the following sections:

- *About the Enterprise App Store on page 6-2*
- *About Installed Apps on page 6-10*

## About the Enterprise App Store

The Enterprise App Store enables you to create a list of webclips and apps for the users to download and install on their Android or iOS mobile devices.

You can also upload iOS applications purchased through Apple's Volume Purchase Program to the Enterprise App Store on the Mobile Security administration web console.

## Managing Enterprise Apps

### Adding an Application

---

#### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store**.

The **Enterprise App Store** screen displays.

2. Click the **Android** or **iOS** tab.
3. Click **Add**.

The **Add Application** window displays.

4. You can now add an application to the list using one of the following options:
  - **Add from local computer**—select an installation file for Android or iOS mobile devices.
  - **Add a Webclip**—type the application's URL and the application's icon will appear on the home screen of user's mobile device, and the link will open in the default web browser on the mobile device.
  - (Android) **Add from external application store**—type the link to the application in an external app store. The application's icon will appear on the home screen of user's mobile device, and the link will open in the default web browser on the mobile device.

- (iOS) **Please input search keyword**—type the name of the VPP application you want to search and select a country to search the application in its Apple app store, and then select the application you want to add from the search results. Once added, the VPP application is only available in the **App Store** on Mobile Security administration web console. To push the application to mobile devices, you will need to add the application to the **Volume Purchasing Program Policy**. See *Volume Purchasing Program Policy on page 5-23* for the procedure.

5. Click **Continue**.

The **Edit Application** screen displays.

6. Configure the following:

- **Application name**: type a name for the application.
- **Application icon**: if the application icon does not appear, click Upload app icon to select and upload the application icon.
- **Application ID**: if the application ID does not appear, type the application ID.
- **VPP codes file**: For iOS VPP application, upload the Volume Purchase Code files that you have received from Apple.
- **Category**: select a category for the application.



**Note**

You must select a category from the drop-down list. To add or delete a category, click the **Category** button.

---

- **Description**: type the description for the application.
- **Publish**: select one of the following:
  - **Do not publish**—to upload the application on the server, but keep hidden from the mobile devices.
  - **Publish as production version**—to upload the application on the server, and publish it for mobile devices to download.

- **Publish as beta version**—to upload the application on the server, and publish it as a beta version for mobile devices to download.
  - **Screenshots**: select and upload application screenshots.
7. Click **Continue**.

The application appears in the applications list.
- 

## Editing Application Information

---

### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store**.

The **Enterprise App Store** screen displays.

2. Click the **Android** or **iOS** tab.
3. Click the application name whose information you want to edit.

The **Edit Application** window displays.

4. Modify the details on the screen.
  5. Click **Continue**.
- 

## Deleting Applications from the App Store

---

### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store**.

The **Enterprise App Store** screen displays.

2. Click the **Android** or **iOS** tab.
3. Select the applications that you want to delete.

4. Click **Delete** and then click **OK** on the confirmation dialog box.
- 

## Managing Application Categories

### Adding an Application Category

---

#### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store**.

The **Enterprise App Store** screen displays.

2. Click the **Android** or **iOS** tab.
3. Click **Manage Category**.
4. Click **Add**.

The **Add Category** window displays.

5. Type the category name and description, and then click **Save**.
- 

### Editing an Application Category

---

#### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store**.

The **Enterprise App Store** screen displays.

2. Click the **iOS Applications** tab or **Android Applications** tab.
3. Click **Manage Category**.
4. Click the category name that you want to edit.

The **Edit Category** window displays.

5. Modify the category details, and then click **Save**.
- 

## Deleting an Application Category

---

### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store**.

The **Enterprise App Store** screen displays.

2. Click the **Android** or **iOS** tab.
  3. Click **Manage Category**.
  4. Select the categories that you want to delete, click **Delete**, and then click **OK** on the confirmation dialog box.
- 

## Managing Apps Purchased through the Volume Purchase Program

---



### Important

VPP is only available in certain regions. Make sure that your organization qualifies. Refer to the following link for the details:

<http://www.apple.com/business/vpp/>

---

Apple uses redemption codes and the Volume Purchase Program (VPP) licenses for the volume purchase of apps. Since you cannot convert the redemption codes into VPP licenses, Mobile Security supports both of these options.

The Volume Purchase Program enables you to distribute VPP licenses to users or devices for iOS applications.

You can manage VPP apps by monitoring the number of remaining licenses and by reclaiming licenses. Users can use VPP apps even if they have not installed the Mobile Security client application on their mobile devices.

**Note**

Mobile Security does not push VPP apps to mobile devices. Users need to download them manually to their mobile devices from the Apple App Store from the following location:  
**App Store > Update > Purchased.**

---

## Setting Up Volume Purchase Program Licenses

---

### Procedure

1. Navigate to the following URL:  
<http://www.apple.com/business/vpp/>
  2. Sign in with your Apple account and download the service token file from the Apple Volume Purchase Program web portal.
  3. On the Mobile Security administration web console, go to **Apps > Enterprise App Store > iOS**.  
The **iOS Enterprise App Store** screen displays.
  4. Go to **Volume Purchase Program (VPP) Management > VPP Setting**.
  5. Upload the token file you downloaded from the Apple web portal in the field provided, and wait until the upload completes.
  6. Click **Sync Now**.
- 

## Assigning or Reclaiming VPP Licenses

Mobile Security enables you to assign or reclaim application licenses purchased through the Volume Purchase Program to a user or device.

**Important**

Before assigning or reclaiming applications, make sure that the Volume Purchase Program Licences are ready.

For more information, see [Setting Up Volume Purchase Program Licences on page 6-7](#).

---

**Procedure**

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store > iOS > Volume Purchase Program (VPP) Management**.

2. Under the **Application List**, locate the application and then click **Assign/Reclaim**.

The **Assign/Reclaim Licenses** screen appears.

3. To assign licenses, perform the following steps.

- Assigning license to a device:
  - a. On the **Devices** tab, select a device or multiple devices with an **Unassigned** status.
  - b. Click **Assign**.

**Note**

Volume Purchasing Program has the following limitations when assigning apps to devices:

- You can only assign VPP apps to devices running on iOS 9 or later.
  - App developers must opt in to device assignment.
- 
- Assigning license to a user:
    - a. On the **Users** tab, select a user or multiple users with an **Unassigned** status.
    - b. Click **Assign**.



**Note**

Mobile Security sends a notification to users after a VPP license is assigned.

To modify the user notification settings, go to **Notification & Reports > User Notifications > VPP User Notification**.

---

The licenses are assigned successfully.

4. To reclaim licenses, perform the following steps.
  - Reclaiming license from a device:
    - a. On the **Devices** tab, select a device or multiple devices with an **Assigned** status.
    - b. Click **Reclaim**.
  - Reclaiming license from a user:
    - a. On the **Users** tab, select a user or multiple users with an **Assigned** status.
    - b. Click **Reclaim**.

The licenses are reclaimed successfully.

---

## Checking Status for VPP Users

---

### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store > iOS**.

The **iOS Enterprise App Store** screen displays.

2. Go to **Volume Purchase Program (VPP) Management > VPP User List**.
3. Under the **Status** column, check the user status.

The **Status** column may display one of the following statuses:

- - : You have not yet assigned any application to this user.

- **Registered:** You have assigned at least one application to the user, but the user has not yet associated the Apple ID with the email address.
- **Associated:** You have assigned at least one application to the user and the user has already associated the Apple ID with the email address.
- **Retired:** You have reclaimed all the licences assigned to this user.

---

## Reclaiming All Licenses from a User

Mobile Security enables you to reclaim all the licenses from a user.

---

### Procedure

1. On the Mobile Security administration web console, go to **Apps > Enterprise App Store > iOS**.

The **iOS Enterprise App Store** screen displays.

2. Click the **Volume Purchase Program (VPP) Management > VPP User List**.
  3. Select the users from the list, and then click **Retire**.
  4. Click **Close** on the **User List** screen.
- 

## About Installed Apps

The **Installed Apps** screen lists all apps installed on all managed Android and iOS devices.

The following table lists the information available for Android and iOS apps.

**TABLE 6-1. Installed App Information**

| INFORMATION | DESCRIPTION     | ANDROID | iOS |
|-------------|-----------------|---------|-----|
| App name    | Name of the app | ●       | ●   |

| INFORMATION               | DESCRIPTION   | ANDROID | iOS |
|---------------------------|---|---------|-----|
| Version                   | App version number  | ●       | ●   |
| Malware scan result       | <p>The malware scan may have any of the following results:</p> <ul style="list-style-type: none"> <li>• <b>Clean</b>—No malware detected</li> <li>• <b>PUA</b>—Potentially unwanted applications or PUAs are grayware apps that could possibly pose a high risk on user security and/or privacy.</li> </ul> <p>For more information, see <a href="http://www.trendmicro.com/vinfo/us/security/definition/potentially-unwanted-app">http://www.trendmicro.com/vinfo/us/security/definition/potentially-unwanted-app</a>.</p> <ul style="list-style-type: none"> <li>• <b>Malware</b>—Known malware</li> <li>• <b>Unknown</b>—No information available</li> </ul> | ●       | ●   |
| Vulnerability scan result | <p>The vulnerability scan may have any of the following risk ratings:</p> <ul style="list-style-type: none"> <li>• <b>Safe</b></li> <li>• <b>Low</b></li> <li>• <b>Medium</b></li> <li>• <b>High</b></li> <li>• <b>Unknown</b>—No information available</li> </ul>  | ●       |     |

| INFORMATION             | DESCRIPTION   | ANDROID | iOS |
|-------------------------|---|---------|-----|
| Privacy scan result     | The privacy scan may have any of the following risk ratings: <ul style="list-style-type: none"> <li>• <b>Safe</b></li> <li>• <b>Low</b></li> <li>• <b>Medium</b></li> <li>• <b>High</b></li> <li>• <b>Unknown</b>—No information available</li> </ul>   | ●       |     |
| Modified                | The modified app scan may have any of the following results: <ul style="list-style-type: none"> <li>• <b>Yes</b>—Original app was modified or repackaged for possibly malicious purposes</li> <li>• <b>No</b>—No modifications have been made to the original app</li> <li>• <b>Unknown</b>—No information available</li> </ul> | ●       |     |
| Number of installations | Number of devices installed with the app  | ●       | ●   |
| Last scanned            | Date and time of the last scan  | ●       | ●   |

## Viewing the Installed Android Apps List

### Procedure

1. On the Mobile Security web console, go to **Apps > Installed Apps > Android**.  
The **Android** tab appears.
2. To view the scan details of an app, click the result under any of the following columns.

- Vulnerability Scan Result
- Privacy Scan Result

The **Scan Details** page of the selected result appears.

3. To view the devices installed with an app, click the number under the **Number of Installations** column.

The **Devices** screen appears and displays the list of devices under the **Managed Devices** tab.

4. To view information on a specific app, type the app name in the **Search** bar and then press Enter.

If the app is in the list, the table displays the app information.

---

## Viewing the Installed iOS Apps List

---

### Procedure

1. On the Mobile Security web console, go to **Apps > Installed Apps > iOS**.

The **iOS** tab appears.

2. Go to the **iOS** tab.

The **iOS** tab appears.

3. To view the devices installed with an app, click the number under the **Number of Installations** column.

The **Devices** screen appears and displays the list of devices under the **Managed Devices** tab.

4. To view information on a specific app, type the app name in the **Search** bar and then press Enter.

If the app is in the list, the table displays the app information.

---



# Chapter 7

## Updating Components

This chapter shows you how to update Mobile Security components.

The chapter includes the following sections:

- *[About Component Updates on page 7-2](#)*
- *[Updating Mobile Security Components on page 7-2](#)*
- *[Manually Updating a local AU server on page 7-6](#)*

## About Component Updates

In Mobile Security, the following components or files are updated through ActiveUpdate, the Trend Micro Internet-based component update feature:

- Mobile Security Server—program installation package for Mobile Security Communication Server.
- Malware Pattern—file containing thousands of malware signatures, and determines the ability of Mobile Security to detect hazardous files. Trend Micro updates pattern files regularly to ensure protection against the latest threats.
- Mobile Device Agents installation program—program installation package for the Mobile Device Agents.

## Updating Mobile Security Components

You can configure scheduled or manual component updates on the Mobile Security Management Server to obtain the latest component files from the ActiveUpdate server. After a newer version of a component is downloaded on the Management Server, the Management Server automatically notifies mobile devices to update components.

### Manual Update


You can perform a manual server and Mobile Device Agent update in the **Manual** tab on **Updates** screen. You should have already configured the download source in the **Source** screen (see [Specifying a Download Source on page 7-5](#) for more information).

---

#### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Administration > Updates**.  
The **Updates** screen displays.
3. Click the **Manual** tab.



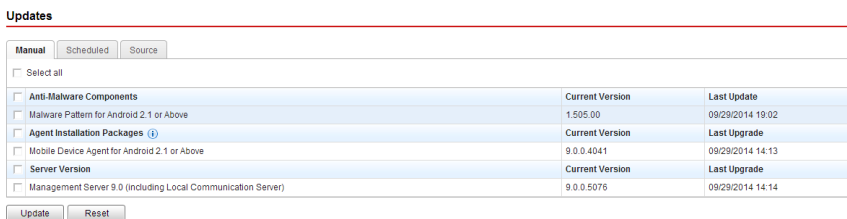

**FIGURE 7-1. The Manual tab on Updates screen**

4. Select the check box of the component you want to update. Select the **Anti-Malware Components**, **Agent Installation Packages** and/or **Server Version** check box(es) to select all components in that group. This screen also displays the current version of each component and the time the component was last updated. See [About Component Updates on page 7-2](#) for more information on each update component.
5. Click **Update** to start the component update process.

## Scheduled Update

Scheduled updates allow you to perform regular updates without user interaction; thereby, reducing your workload. You should have already configured the download source in the **Source** screen (refer to [Specifying a Download Source on page 7-5](#) for more information).

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Administration > Updates**.  
The **Updates** screen displays.
3. Click the **Scheduled** tab.

**Updates**

Manual **Scheduled** Source

Enable scheduled update of the Mobile Security Management Module.

|  | Current Version | Last Update      |
|--|-----------------|------------------|
| <input checked="" type="checkbox"/> <b>Anti-Malware Components</b>                               |                 |                  |
| <input checked="" type="checkbox"/> Malware Pattern for Android 2.1 or Above                     | 1.791.00        | 08/25/2014 13:56 |
| <input checked="" type="checkbox"/> <b>Agent Installation Packages</b> (1)                       |                 |                  |
| <input checked="" type="checkbox"/> Mobile Device Agent for Android 2.1 or Above                 | 9.0.0.1221      | 08/27/2014 11:07 |
| <input checked="" type="checkbox"/> <b>Server Version</b>  |                 |                  |
| <input checked="" type="checkbox"/> Management Server 9.0 (including Local Communication Server) | 9.0.0.5613      | 08/27/2014 11:07 |

**Update Schedule**

Hourly  
 Daily  
 Weekly, every   
 Monthly, on day

Start time:  :  (hh:mm)

**FIGURE 7-2. The Scheduled tab on Updates screen**

4. Select the check box of the component you want to update. Select the **Anti-Malware Components**, **Agent Installation Packages** and/or **Server Version** check box(es) to select all components in that group. This screen also displays each component's current version and the time the component was last updated.
5. Under **Update Schedule**, configure the time interval to perform a server update. The options are **Hourly**, **Daily**, **Weekly**, and **Monthly**.
  - For weekly updates, specify the day of the week (for example, Sunday, Monday, and so on.)
  - For monthly updates, specify the day of the month (for example, the first day, or 01, of the month and so on).



**Note**

The **Update for a period of x hours** feature is available for the **Daily**, **Weekly**, and **Monthly** options. This means that your update will take place sometime within the number of hours specified, following the time selected in the **Start time** field. This feature helps with load balancing on the ActiveUpdate server.

- Select the **Start time** when you want Mobile Security to initiate the update process.
6. Click **Save** to save the settings.

## Specifying a Download Source

You can set Mobile Security to use the default ActiveUpdate source or a specified download source for server update.

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Administration > Updates**.

The **Updates** screen displays. For more information about the update see [Manual Update on page 7-2](#) or for scheduled update see [Scheduled Update on page 7-3](#).

3. Click the **Source** tab.

You are here: Administration > [Updates](#)

### Updates

Manual Scheduled **Source**

Trend Micro's ActiveUpdate server  
<http://mobilesecurity.activeupdate.trendmicro.com/Activeupdate/>

Other update source:

Intranet location containing a copy of the current file  
 UNC path:   
 Username:   
 Password:

Save

**FIGURE 7-3. The Source tab on Updates screen**

4. Select one of the following download sources:
  - **Trend Micro ActiveUpdate server**—the default update source.

- **Other update source**—specify HTTP or HTTPS website (for example, your local Intranet website), including the port number that should be used from where Mobile Device Agents can download updates.

**Note**

The updated components have to be available on the update source (web server). Provide the host name or IP address, and directory (for example, `https://12.1.123.123:14943/source`).

---

- **Intranet location containing a copy of the current file**—the local intranet update source. Specify the following:
    - **UNC path**: type the path where the source file exists.
    - **Username and Password**: type the username and password if the source location requires authentication.
- 

## Manually Updating a local AU server

If the Server/Device is updated through a Local AutoUpdate Server, but the Management Server cannot connect to the Internet; then, manually update the local AU Server before doing a Server/Device Update.

---

### Procedure

1. Obtain the installation package from your Trend Micro representative.
2. Extract the installation package.
3. Copy the folders to the local AutoUpdate Server.

**Note**

When using a local AutoUpdate Server, you should check for updates periodically.

---

# Chapter 8

## Viewing and Maintaining Logs

This chapter shows you how to view Mobile Device Agent logs on the Mobile Security administration web console and configure log deletion settings.

The chapter includes the following sections:

- *[About Mobile Device Agent Logs on page 8-2](#)*
- *[Viewing Mobile Device Agent Logs on page 8-2](#)*
- *[Log Maintenance on page 8-4](#)*

## About Mobile Device Agent Logs

When Mobile Device Agents generate a malware protection log, Web threat protection log, policy violation log or an event log, the log is sent to the Mobile Security Management Server. This enables Mobile Device Agent logs to be stored on a central location so you can assess your organization's protection policies and identify mobile devices at a higher risk of infection or attack.



### Note

You can view SMS anti-spam, WAP push protection, and call filtering logs on the mobile devices.

---

## Viewing Mobile Device Agent Logs

You can view Mobile Device Agent logs on mobile devices or view all Mobile Device Agent logs on Mobile Security Management Server. On the Management Server, you can view the following Mobile Device Agent logs:

- **Malware Protection Logs**—Mobile Device Agent generates a log when a malware is detected on the mobile device. These logs allow you to keep track of the malware that were detected and the measures taken against them.
- **Privacy Scan Logs**—Mobile Security Agent generates a log when it detects a privacy threat and then uploads the log to the server.
- **Web Threat Protection Logs**—Mobile Security Agent generates a log when it blocks a dangerous or malware-infected web page and then uploads the log to the server.
- **Event Logs**—these logs are generated when certain actions are taken by the server and the Mobile Device Agent.
- **Policy Violation Logs**—these logs include information about the policy compliant status of Mobile Device Agents.
- **Vulnerability Scan Logs**—Mobile Security Agent generates a log when it detects a vulnerability risk and then uploads the log to the server.

- Modified App Scan Logs—Mobile Security Agent generates a log when it detects a modified app and then uploads the log to the server.

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Notifications & Reports > Log Query**.

The **Log Query** screen displays.

**FIGURE 8-1. Log Query screen**

3. Specify the query criteria for the logs you want to view. The parameters are:
  - **Log types**—select the log type from the drop down menu.
  - **Category**—select the log category from the drop down menu.
  - **Admin name**—type the administrator name whose generated logs you want to search.
  - **Time period**—select a predefined date range. Choices are: **All**, **Last 24 hours**, **Last 7 days**, and **Last 30 days**. If the period you require is not covered by the above options, select **Range** and specify a date range.
    - **From**—type the date for the earliest log you want to view. Click the icon to select a date from the calendar.
    - **To**—type the date for the latest log you want to view. Click the icon to select a date from the calendar.

- **Sort by**—specify the order and grouping of the logs.
4. Click **Query** to begin the query.
- 

## Log Maintenance

When Mobile Device Agents generate event logs about security risk detection, the logs are sent and stored on the Mobile Security Management Module. Use these logs to assess your organization's protection policies and identify mobile devices that face a higher risk of infection or attack.

To keep the size of your Mobile Device Agent logs from occupying too much space on your hard disk, delete the logs manually or configure Mobile Security administration web console to delete the logs automatically based on a schedule in the Log Maintenance screen.

## Scheduling Log Deleting

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Notifications & Reports > Log Maintenance**.

The **Log Maintenance** screen displays.

3. Select **Enable scheduled deletion of logs**.
  4. Select the log types to delete: Malware, Event or Policy Violation.
  5. Select whether to delete logs for all the selected log types or those older than the specified number of days.
  6. Specify the log deletion frequency and time.
  7. Click **Save**.
-



## Deleting Logs Manually

---

### Procedure

1. Log on to the Mobile Security administration web console.
  2. Click **Notifications & Reports > Log Maintenance**.  
The **Log Maintenance** screen displays.
  3. Select the log types to delete.
  4. Select whether to delete logs for all the selected log types or only older than the specified number of days.
  5. Click **Delete Now**.
-



# Chapter 9

## Using Notifications and Reports

This chapter shows you how to configure and use notifications and reports in Mobile Security.

The chapter includes the following sections:

- *About Notification Messages and Reports on page 9-2*
- *Configuring Notification Settings on page 9-2*
- *Configuring Email Notifications on page 9-2*
- *Administrator Notifications on page 9-3*
- *Reports on page 9-4*
- *User Notifications on page 9-9*

## About Notification Messages and Reports

You can configure Mobile Security to send notifications and reports via email to the administrator(s) and/or users.

- **Administrator Notifications**—sends email notifications to the administrator in case any system abnormality occurs.
- **Reports**—sends reports to the specified email recipients.
- **User Notifications**—sends email and/or a text message to notify mobile devices to download and install Mobile Device Agent.

## Configuring Notification Settings

### Configuring Email Notifications

If you want to send email message notifications to the users, then you must configure these settings.

---

#### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Notifications & Reports > Settings**.

The **Notifications & Reports Settings** screen displays.

3. Under **Email Settings** section, type the **From** email address, the SMTP server IP address and its port number.
  4. If the SMTP server requires authentication, select **Authentication**, and then type the username and password.
  5. Click **Save**.
-

## Administrator Notifications

Use the **Administrator Notifications** screen to configure the following:

- **System Error**—sends email notification to the administrator in case any system abnormality occurs. Token variables <%PROBLEM%>, <%REASON%> and <%SUGGESTION%> will be replaced by the actual problem, reason and the suggestion to resolve the problem.
- **Deactivated Device Administrator for Mobile Security**—sends email notification to administrator when Mobile Security is disabled in the **Device administrators** list on any Android mobile device. Token variable <%DEVICE%> will be replaced by the mobile device name in the email.
- **APNS Certificate Expired Warning**—sends email notification to administrator one month before the APNs certificate expires.
- **Malware Scan Realtime Log**—sends email notification to administrator when the agent detects a malware.
- **VPP Token Expiry Warning**—sends email notification to administrator 15 days before the VPP token expires.
- **DEP Token Expiry Warning**—sends email notification to administrator 15 days before the DEP token expires.

## Enabling Administrator Notifications

---

### Procedure

1. Go to **Notifications & Reports > Administrator Notifications**.  
The **Administrator Notifications** screen displays.
  2. Select the notifications and reports you want to receive via email.
  3. Click **Save**.
-

## Configuring Administrator Notification Settings

---

### Procedure

1. Go to **Notifications & Reports > Administrator Notifications**.

The **Administrator Notifications** screen displays.

2. Under **Notification Settings**, click a notification name.

The **Email Settings** screen of the selected notification appears.

3. Update the following as required:

- **To:** Email address of the administrator.



#### Note

Use a semicolon “;” to separate multiple email addresses.

---

- **Subject:** Subject line of the notification email.
- **Message:** Message body of the notification .



#### Important

Include the token variables provided in the default email template when modifying a notification message.

---

4. Click **Save**.
- 

## Reports

Mobile Security allows you to generate and send the following reports:

- **Devices Inventory Report**—displays comprehensive information on all managed devices.
- **Compliance Violation Report**—displays information on compliance violation.

- **Malware Detection Report**—displays information on detected malware.
- **Web Threat Protection Report**—displays information on blocked URLs.
- **Application Inventory Report**—displays information on top applications installed on Android and iOS devices.
- **Devices Enrollment Report**—displays information on device enrollment.
- **Devices Unenrollment Report**—displays information on device unenrollment.

You can perform the following tasks from the **Reports** screen.

**TABLE 9-1. Report Tasks**

| TASK     | DESCRIPTION   |
|----------|---|
| Generate | You can generate new reports whenever you need them.<br>For more information, see <a href="#">Generating Reports on page 9-5</a> .                                    |
| View     | You can view the last generated reports from the On-Demand tab.<br>For more information, see <a href="#">Viewing Reports on page 9-6</a> .                            |
| Send     | You can choose to send reports via email whenever needed.<br>For more information, see <a href="#">Sending Reports on page 9-7</a> .                                  |
| Schedule | You can specify a fixed schedule for sending reports to administrators and other users.<br>For more information, see <a href="#">Scheduling Reports on page 9-8</a> . |

## Generating Reports



### Note

Mobile Security only keeps one copy of each report type on the server.

Save a copy of the latest report before generating a new version.

---

### Procedure

1. On the Mobile Security administration web console, go to **Notifications & Reports > Reports > On-Demand**.

The **On-Demand** screen displays.

2. Select the time period.
  - Today
  - Last 7 days
  - Last 30 days
3. Select the user information to include in the report.
  - All
  - Specific
4. Select the reports that you want to generate.
5. Click **Generate**.

Mobile Security generates the selected reports and overwrites all existing versions.

---

## Viewing Reports

---

### Procedure

1. On the Mobile Security administration web console, go to **Notifications & Reports > Reports**.
2. Locate the report you want to view from any of the following tabs.
  - **On-Demand**—Select to view on-demand reports.
  - **Scheduled**—Select to view scheduled reports.
3. Click **View**.



**Note**

If you do not see the link, you must first generate the report.

For more information, see [Generating Reports on page 9-5](#).

---

The selected report opens up in a new tab or window.

---

## Sending Reports

---

### Procedure

1. On the Mobile Security administration web console, go to **Notifications & Reports > Reports > On-Demand**.

The **On-Demand** screen displays.

2. Locate the report you want from the **Report** table.
3. Click **Send**.

**Note**

If you do not see the link, you must first generate the report.

For more information, see [Generating Reports on page 9-5](#).

---

The **Send Report** screen appears.

4. Type the email address of the recipient.
5. You can choose to modify the email subject and message.
6. Click **Send**.

A confirmation message appears.

---

## Scheduling Reports

---

### Procedure

1. On the Mobile Security administration web console, go to **Notifications & Reports > Reports > Scheduled**.

The **Scheduled** screen displays.

2. Select the report frequency from the drop-down list.
    - **Daily**
    - **Weekly**: Specify the day of the week when the report will be sent out using the drop-down list.
    - **Monthly**: Specify the day of the month when the report will be sent out using the drop-down list.
  3. Click **Save**.
- 

## Modifying the Email Template

---

### Procedure

1. On the Mobile Security administration web console, go to **Notifications & Reports > Reports > Scheduled**.

The **Scheduled** screen displays.

2. Click a report name.

The **Email Settings** screen of the selected report appears.

3. Update the following as required:
  - **To**: Email address of the administrator.

**Note**

Use a semicolon “;” to separate multiple email addresses.

---

- **Subject:** Subject line of the report email.
  - **Message:** Message body of the report.
4. Click **Save**.

A confirmation message appears.

---

## User Notifications

Use the **User Notifications** screen to configure the following email message notification:

- **Mobile Device Enrollment**—sends email and/or a text message to notify mobile devices to download and install Mobile Device Agent. Token variable <%DOWNLOADURL%> will be replaced by the actual URL of the setup package.
- **Policy Violation**—sends email notification to mobile devices if the compliance criteria is not met. Token variables <%DEVICE%> and <%VIOLATION%> will be replaced by the mobile device’s name in the email, and the policies that it violates.
- **VPP User Notification**—sends email notification to a mobile device when administrator assigns a VPP app to a user.

## Configuring User Notifications

---

### Procedure

1. Log on to the Mobile Security administration web console.
2. Click **Notifications & Reports > Settings**.  
The **Notifications & Reports Settings** screen displays.
3. Select the notifications you want to send to user via email or text message, and then click on individual notifications to modify their contents.

- To configure email notification messages, update the following details as required:
    - **Subject:** The subject of the email message.
    - **Message:** The body of the email message.
  - To configure text notification messages, update the body of the message in the **Message** field.
4. Click **Save** when done, to return back to the **User Notifications** screen.
-

# Chapter 10

## Troubleshooting and Contacting Technical Support

Here you will find answers to frequently asked questions and you learn how to obtain additional Mobile Security information.

The chapter includes the following sections:

- *Troubleshooting on page 10-2*
- *Before Contacting Technical Support on page 10-5*
- *Sending Suspicious Content to Trend Micro on page 10-6*
- *TrendLabs on page 10-6*
- *About Software Updates on page 10-6*
- *Other Useful Resources on page 10-8*
- *About Trend Micro on page 10-8*

## Troubleshooting

This section provides tips for dealing with issues you may encounter when using Mobile Security.

- **User cannot input nanoscale passwords on their devices.**

Mobile device keypads can only support a certain set of characters. Mobile Security recommends that the administrator compile a list of characters supported by the devices. After compiling the list of supported characters, the administrator can then set the uninstall protection password from the management console using the list of supported characters.

- **After canceling the Communication Server uninstallation process, the Communication Server fails to function normally.**

If the uninstallation process started deleting the files and services that are important for the Communication Server's normal operation before the process was stopped, the Communication Server may not function normally. To resolve this issue, install and configure the Communication Server again.

- **iOS mobile devices cannot enroll successfully to the Management Server, and displays "Unsupported URL" error message.**

This issue may happen if the system clock of SCEP server is set to the incorrect time or the Simple Certificate Enrollment Protocol (SCEP) certificate is not obtained by Trend Micro Mobile Security. Make sure that the system clock of SCEP server is set to the correct time. If the issue persists, perform the following steps:

1. Log on to the Mobile Security administration web console.
2. Click **Administration > Communication Server** Settings.
3. Without changing the settings, click **Save**.

- **Unable to save Database Settings if you use SQL Server Express.**

If you are using SQL Server Express, use the following format in the Server address field: `<SQL Server Express IP address>\sqlexpress`.

**Note**

Replace `<SQL Server Express IP address>` with the IP address of SQL Server Express.

- **Unable to connect to the SQL Server.**

This problem may occur when the SQL Server is not configured to accept remote connections. By default, the SQL Server Express and SQL Server Developer editions do not allow remote connections. To configure the SQL Server to allow remote connections, perform the following steps:

1. Enable remote connections on the instance of SQL Server that you want to connect to from a remote computer.
2. Turn on the SQL Server Browser service.
3. Configure the firewall to allow network traffic that is related to the SQL Server and to the SQL Server Browser service.

- **Unable to connect to SQL Server 2008 R2.**

This problem may occur if Visual Studio 2008 is not installed in the default location and therefore, the SQL Server 2008 setup cannot find `devenv.exe.config` configuration file. To resolve this issue, perform the following steps:

1. Go to `<Visual Studio installation folder>\Microsoft Visual Studio 9.0\Common7\IDE` folder, find and copy `devenv.exe.config` file and paste it to the following folder (you may need to enable display extensions for known file types in folder options):
  - For 64-bit Operating System:  
`C:\Program Files (x86)\Microsoft Visual Studio 9.0\Common7\IDE`
  - For 32-bit Operating System:  
`C:\Program Files\Microsoft Visual Studio 9.0\Common7\IDE`
2. Run the SQL Server 2008 setup again and add BIDS feature to the existing instance of SQL Server 2008.

- **Unable to export the client device list in Device Management.**

This may occur if the downloading of encrypted files is disabled in the Internet Explorer. Perform the following steps to enable the encrypted files download:

1. On your Internet Explorer, go to **Tools > Internet options**, and then click the **Advanced** tab on the **Internet Options** window.
2. Under **Security** section, clear **Do not save encrypted pages to disk**.
3. Click **OK**.

- **The status of certain Android mobile device is always Out of Sync.**

This is because the Mobile Security device administrator is not activated on that mobile device. If the user does not activate Mobile Security in the Device administrators list, then the Mobile Security cannot synchronize server policies with the mobile device, and displays its status as Out of Sync.

- **The content on the Policy pop-up window does not display and is blocked by Internet Explorer.**

This happens if your Internet Explorer is configured to use a .pac automatic configuration file. In that case, the Internet Explorer will block the access to a secure website that contains multiple frames. To resolve this issue, add the Mobile Security Management Server address to the Trusted sites security zone in Internet Explorer. To do this, perform the following steps:

1. Start Internet Explorer.
2. Go to **Tools > Internet options**.
3. On the **Security** tab, click **Trusted sites**, and then click **Sites**.
4. In the **Add this website to the zone** text field, type the Mobile Security Management Server URL, and then click **Add**.
5. Click **OK**.

For more details on this issue, refer to the following URL:

<http://support.microsoft.com/kb/908356>



## Before Contacting Technical Support

Before contacting technical support, here are two things you can quickly do to try and find a solution to your problem:

- **Check your documentation**—The manual and online help provide comprehensive information about Mobile Security. Search both documents to see if they contain your solution.
- **Visit our Technical Support Website**—Our Technical Support website, called Knowledge Base, contains the latest information about all Trend Micro products. The support website has answers to previous user inquiries.

To search the Knowledge Base, visit

<http://esupport.trendmicro.com>

## Contacting Trend Micro

In the United States, Trend Micro representatives are available by phone, fax, or email:

|               |   |
|---------------|---|
| Address       | Trend Micro, Inc., 225 E. John Carpenter Freeway, Suite 1500, Irving, Texas 75062 |
| Phone         | Phone: +1 (817) 569-8900<br>Toll free: (888) 762-8736                             |
| Website       | <a href="http://www.trendmicro.com">http://www.trendmicro.com</a>                 |
| Email address | <a href="mailto:support@trendmicro.com">support@trendmicro.com</a>                |

- Worldwide support offices:  
<http://www.trendmicro.com/us/about-us/contact/index.html>
- Trend Micro product documentation:  
<http://docs.trendmicro.com>

## Sending Suspicious Content to Trend Micro

Several options are available for sending suspicious content to Trend Micro for further analysis.

### File Reputation Services

Gather system information and submit suspicious file content to Trend Micro:

<http://esupport.trendmicro.com/solution/en-us/1059565.aspx>

Record the case number for tracking purposes.

## TrendLabs

Trend Micro TrendLabs<sup>SM</sup> is a global network of antivirus research and product support centers providing continuous, 24 x 7 coverage to Trend Micro customers worldwide.

Staffed by a team of more than 250 engineers and skilled support personnel, the TrendLabs dedicated service centers worldwide ensure rapid response to any virus outbreak or urgent customer support issue, anywhere in the world.

The TrendLabs modern headquarters earned ISO 9002 certification for its quality management procedures in 2000. TrendLabs is one of the first antivirus research and support facilities to be so accredited. Trend Micro believes that TrendLabs is the leading service and support team in the antivirus industry.

For more information about TrendLabs, please visit:

<http://us.trendmicro.com/us/about/company/trendlabs/>

## About Software Updates

After a product release, Trend Micro often develops updates to the software, to enhance product performance, add new features, or address a known issue. There are different types of updates, depending on the reason for issuing the update.

The following is a summary of the items Trend Micro may release:

- **Hotfix**—A hotfix is a workaround or solution to a single customer-reported issue. Hotfixes are issue-specific, and therefore not released to all customers. Windows hotfixes include a Setup program, while non-Windows hotfixes do not (typically you need to stop the program daemons, copy the file to overwrite its counterpart in your installation, and restart the daemons).
- **Security Patch**—A security patch is a hotfix focusing on security issues that is suitable for deployment to all customers. Windows security patches include a Setup program, while non-Windows patches commonly have a setup script.
- **Patch**—A patch is a group of hotfixes and security patches that solve multiple program issues. Trend Micro makes patches available on a regular basis. Windows patches include a Setup program, while non-Windows patches commonly have a setup script.
- **Service Pack**—A service pack is a consolidation of hot fixes, patches, and feature enhancements significant enough to be considered a product upgrade. Both Windows and non-Windows service packs include a Setup program and setup script.

Check the Trend Micro Knowledge Base to search for released hotfixes:

<http://esupport.trendmicro.com>

Consult the Trend Micro website regularly to download patches and service packs:

<http://www.trendmicro.com/download>

All releases include a readme file with the information needed to install, deploy, and configure your product. Read the readme file carefully before installing the hotfix, patch, or service pack file(s).

## Known Issues

Known issues are features in Mobile Security that may temporarily require a workaround. Known issues are typically documented in the Readme document you received with your product. Readmes for Trend Micro products can also be found in the Trend Micro Download Center:

<http://www.trendmicro.com/download/>

Known issues can be found in the technical support Knowledge Base:

<http://esupport.trendmicro.com>

Trend Micro recommends that you always check the Readme text for information on known issues that could affect installation or performance, as well as a description of what's new in a particular release, system requirements, and other tips.

## Other Useful Resources

Mobile Security offers a host of services through its website, <http://www.trendmicro.com>.

Internet-based tools and services include:

- Virus Map— monitor malware incidents around the world
- Virus risk assessment— the Trend Micro online malware protection assessment program for corporate networks.

## About Trend Micro

Trend Micro, Inc. is a global leader in network anti-malware and Internet content security software and services. Founded in 1988, Trend Micro led the migration of malware protection from the desktop to the network server and the Internet gateway—gaining a reputation for vision and technological innovation along the way.

Today, Trend Micro focuses on providing customers with comprehensive security strategies to manage the impacts of risks to information, by offering centrally controlled server-based malware protection and content-filtering products and services. By protecting information that flows through Internet gateways, email servers, and file servers, Trend Micro allows companies and service providers worldwide to stop malware and other malicious code from a central point, before they ever reach the desktop.

For more information, or to download evaluation copies of Trend Micro products, visit our award-winning website:

<http://www.trendmicro.com>



# Index

## A

- administration web console, 2-2, 2-4
  - operations, 2-2
  - URL, 2-2
  - username and password, 2-3
- anti-malware scanning, 1-9

## C

- call filtering, 1-10
  - filtering list configuration, 5-18
  - filtering list format, 5-19
- clearing corporate data on mobile devices, 3-13
- command statuses, 2-18
- Compatibility View, 2-4
- compliance policy
  - check list, 5-21
- component updates
  - about, 7-2
  - download sources, 7-5
  - local AU server, 7-6
  - manual, 7-2
  - scheduled, 7-3

## D

- Dashboard
  - application control status, 2-7
  - encryption status, 2-7
  - jailbreak/root status, 2-7
  - mobile device status, 2-5
  - patch and component update status, 2-6
  - server update status, 2-6

## E

- enterprise app store

about, 6-2

Exchange ActiveSync Devices tab, 3-18

## F

- Facebook Scan, 1-8
- Full license version, 2-4

## G

- General Policy
  - log settings, 5-8
  - uninstall protection features, 5-7
  - update settings, 5-8
- Google Play, 1-8

## I

- installed apps, 6-10
- invitation statuses, 4-8

## K

- Knowledge Base, 10-5
- known issues, 10-7

## L

- location awareness, 1-9
- locking a mobile device, 3-12

## M

- Managed Devices tab, 3-2
- MDA logs
  - about, 8-2
  - Event Logs, 8-2
  - log types, 8-2
  - Malware Protection Logs, 8-2
  - manual deletion, 8-5
  - Modified App Scan Logs, 8-3
  - Policy Violation Logs, 8-2

- Privacy Log, 8-2
- query criteria, 8-3
- scheduled deletion, 8-4
- Vulnerability Scan Logs, 8-2
- Web Threat Protection Logs, 8-2
- mobile device authentication, 1-11
- Mobile Security
  - about, 1-2
  - Active Directory, 1-5
  - architecture, 1-2
  - Basic Security Model, 1-3
  - certificate
    - APNs certificate, 1-5
    - authority, 1-5
    - management, 2-21
    - public and private keys, 1-5
    - SCEP, 1-5
    - security credentials, 1-5
    - SSL certificate, 1-6
  - Cloud Communication Server, 1-4
  - communication methods, 1-2
  - Communication Server, 1-4
  - Communication Server types, 1-4
  - components, 1-3
  - deployment models, 1-3
  - encryption software compatibility, 1-2
  - Enhanced Security Model
    - Cloud Communication Server, 1-3
    - Local Communication Server, 1-3
  - Exchange Connector, 1-4
  - Local Communication Server, 1-4
  - Management Server, 1-3
  - Microsoft SQL Server, 1-5
  - Mobile Device Agent, 1-5
  - OfficeScan, 1-2
  - SMTP server, 1-6
  - sub-groups, 3-2
  - unwanted network communications, 1-2
  - mobile threats, 1-2
  - spam messages, 1-2
- N**
  - notifications, 9-3
  - notifications and reports
    - about, 9-2
    - email message configuration, 9-9
    - token variables, 9-9
- P**
  - password
    - reset password, 3-14
    - uninstall protection, 10-2
- R**
  - regular updates, 1-11
  - reports, 9-4
  - resources
    - Internet-based tools and services, 10-8
  - root account properties, 2-11
- S**
  - Scan from Cloud, 1-9
  - security scan, 1-9
  - send email alert, 5-23
  - SMS anti-spam, 1-10
  - SMS sender, 1-9
  - software update
    - about, 10-6
    - readme file, 10-7
    - release items, 10-7
  - spam
    - SMS, 5-15
      - filtering list configuration, 5-15
      - filtering list format, 5-17



WAP Push, 5-17

    approved list format, 5-17

Super Administrator role properties, 2-11

## T

Technical Support Web site, 10-5

TrendLabs, 10-6

Trend Micro

    about, 10-8

troubleshooting tips, 10-2, 10-3

    .pac automatic configuration file, 10-4

    client device list, 10-4

    Communication Server, 10-2

    devenv.exe.config configuration file,  
    10-3

    Out of Sync, 10-4

    SCEP certificate, 10-2

    SQL Server 2008 R2, 10-3

    SQL Server Express, 10-2

    system clock, 10-2

## U

user account details, 2-14

## W

WAP Push protection, 1-11

Web security, 1-9

what's new

    9.3, 1-8

    v9.5, 1-7

    v9.6, 1-6



**TREND MICRO INCORPORATED**

225 E. John Carpenter Freeway, Suite 1500  
Irving, Texas 75062 U.S.A.  
Phone: +1 (817) 569-8900, Toll-free: (888) 762-8736  
Email: support@trendmicro.com

[www.trendmicro.com](http://www.trendmicro.com)

Item Code: TSEM97293/160105